

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
15 March 2001 (15.03.2001)

PCT

(10) International Publication Number  
WO 01/18745 A3

(51) International Patent Classification?: G06K 19/02,  
19/07, 19/16, B42D 15/10

Lisa; 121 Leroy Avenue, Darien, CT 06820 (US). VIG-  
ILETTI, Judy; 30 Applebee Farm Road, Croton on Hud-  
son, NY 10520 (US).

(21) International Application Number: PCT/US00/24371

(74) Agent: SOBELMAN, Howard, I.; Snell & Wilmer L.L.P.,  
One Arizona Center, 400 East Van Buren, Phoenix, AZ  
85004-2202 (US).

(22) International Filing Date:  
5 September 2000 (05.09.2000)

(25) Filing Language: English

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,  
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,  
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,  
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,  
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(26) Publication Language: English

(30) Priority Data:  
60/153,112 7 September 1999 (07.09.1999) US  
60/160,519 20 October 1999 (20.10.1999) US  
60/167,405 24 November 1999 (24.11.1999) US

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,  
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant: AMERICAN EXPRESS TRAVEL RE-  
LATED SERVICES COMPANY, INC. [US/US];  
American Express Tower, World Financial Center, New  
York City, NY 10285-4900 (US).

(72) Inventors: FAENZA, William, J., Jr.; 5606 Davis Ford  
Road, Manassas, VA 22110 (US). LASCH, Ellen; 255  
West 85th Street, New York City, NY 10024 (US). WEBB,

Published:  
— with international search report

[Continued on next page]

(54) Title: TRANSPARENT TRANSACTION CARD WITH INFRARED BLOCKING LAYER

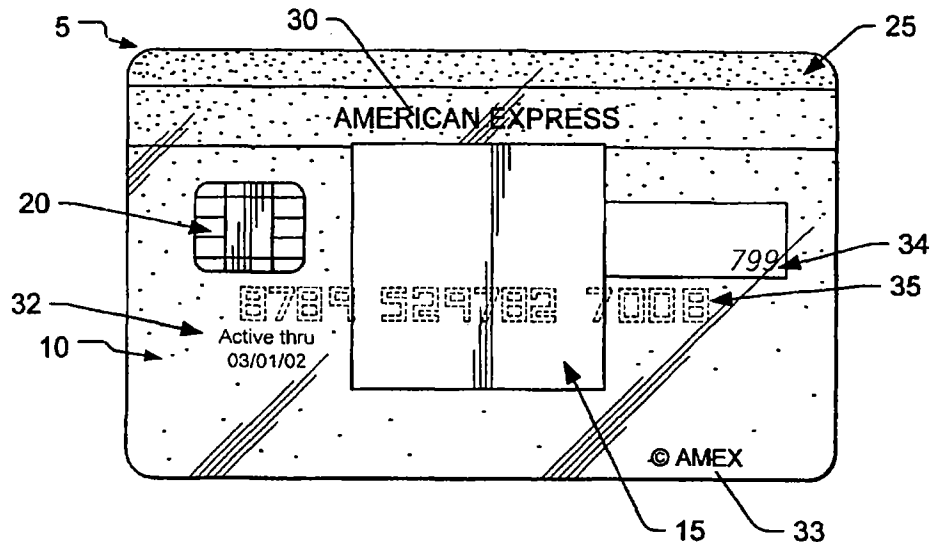

(57) Abstract: The present invention relates to a process for producing an opaque, transparent or translucent transaction card having multiple features, such as a holographic foil, integrated circuit chip, silver magnetic stripe with text on the magnetic stripe, opacity gradient, an invisible optically recognizable compound, a translucent signature field such that the signature on back of the card is visible from the front of the card and an active thru date on the front of the card. The invisible optically recognizable compound is an infrared ink and/or film, which can be detected by a sensor found in an ATM or card assembly line.



WO 01/18745 A3



**(88) Date of publication of the international search report:**  
13 September 2001

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

# INTERNATIONAL SEARCH REPORT

Int. Application No  
PCT/US 00/24371

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 7 G06K19/02 G06K19/07 G06K19/16 B42D15/10

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
 IPC 7 G06K B42D G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)  
 PAJ, WPI Data, EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 010 243 A (FUKUSHIMA YOICHI ET AL) 23 April 1991 (1991-04-23) column 7, line 30 - line 46 column 9, line 13 - line 36 figures 6,7	1-5,7-9, 17-19,21
Y	---	22
Y	EP 0 181 770 A (CANADIAN PATENTS DEV) 21 May 1986 (1986-05-21) page 5, line 20 -page 6, line 11 page 16, line 26 - line 28 figure 1	22
	---	
	-/--	

Further documents are listed in the continuation of box C.       Patent family members are listed in annex.

\* Special categories of cited documents :

<p>*A* document defining the general state of the art which is not considered to be of particular relevance</p> <p>*E* earlier document but published on or after the international filing date</p> <p>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>*O* document referring to an oral disclosure, use, exhibition or other means</p> <p>*P* document published prior to the international filing date but later than the priority date claimed</p>	<p>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>*&amp;* document member of the same patent family</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Date of the actual completion of the international search  <b>21 February 2001</b>	Date of mailing of the international search report  <b>28.02.2001</b>
------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------

Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040. Tx. 31 651 epo nl. Fax: (+31-70) 340-3016	Authorized officer  <b>de Ronde, J.</b>
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------

INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 00/24371

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 013, no. 167 (P-861), 20 April 1989 (1989-04-20) -& JP 01 004934 A (BROTHER IND LTD), 10 January 1989 (1989-01-10) abstract page 3, column 2, line 21-27; figures 1-3 ----	1-5,7-9, 17-19
X	US 5 928 788 A (RIEDL JOSEF) 27 July 1999 (1999-07-27) column 3, line 36 - line 58 column 5, line 59 - line 67 figures 1,2 ----	1-4,7,9, 13,17-19
X	EP 0 343 829 A (TIME & DATA SYST INT) 29 November 1989 (1989-11-29) column 4, line 31 - line 39 column 6, line 36 -column 7, line 8 figures 1,2 ----	1-5,7-9
X	US 3 763 356 A (BERLER R) 2 October 1973 (1973-10-02) column 3, line 15 - line 29 column 5, line 14 - line 34 figure 5 ----	1-4,7,9
X	CH 689 680 A (ELECTROWATT TECH INNOVAT CORP) 13 August 1999 (1999-08-13) column 7, line 26 - line 51 figure 7 ----	20
X	US 3 955 295 A (MAYER SIMON ERNEST) 11 May 1976 (1976-05-11) column 4, line 35 - line 49 ----	1-4
X	GB 2 108 906 A (ITR INT TIME LTD) 25 May 1983 (1983-05-25) column 4, line 35 - line 49 -----	1-4

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US 00/24371

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1.  Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2.  Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
  
3.  Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

As a result of the prior review under R. 40.2(e) PCT,  
no additional fees are to be refunded.

1.  As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2.  As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3.  As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4.  No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest.
- No protest accompanied the payment of additional search fees.

**FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210**

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-20

A card comprising a transparent or translucent card surface,  
and a machine recognizable compound associated with a  
portion of said surface,

wherein said machine recognizable compound includes an  
infrared ink

2. Claims: 21,22

A process for fabricating a card including placing an IR  
film between two layers of PET GS.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/24371

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5010243 A	23-04-1991	JP 63098689 A	30-04-1988
		AT 80091 T	15-09-1992
		CA 1328363 A	12-04-1994
		DE 3781502 D	08-10-1992
		DE 3781502 T	07-01-1993
		EP 0264277 A	20-04-1988
		US 4945215 A	31-07-1990
EP 0181770 A	21-05-1986	CA 1228225 A	20-10-1987
		ES 548621 D	01-04-1987
		ES 8704653 A	16-06-1987
		JP 61130918 A	18-06-1986
JP 01004934 A	10-01-1989	NONE	
US 5928788 A	27-07-1999	DE 19507144 A	25-04-1996
		AT 171672 T	15-10-1998
		DE 59503783 D	05-11-1998
		DK 734322 T	21-06-1999
		WO 9611805 A	25-04-1996
		EP 0734322 A	02-10-1996
		ES 2121423 T	16-11-1998
		JP 9507266 T	22-07-1997
EP 0343829 A	29-11-1989	JP 1307937 A	12-12-1989
US 3763356 A	02-10-1973	NONE	
CH 689680 A	13-08-1999	NONE	
US 3955295 A	11-05-1976	US 3922430 A	25-11-1975
GB 2108906 A	25-05-1983	US 4538059 A	27-08-1985

CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
15 March 2001 (15.03.2001)

PCT


(10) International Publication Number  
WO 01/018745 A3

- (51) International Patent Classification<sup>7</sup>: G06K 19/02, 19/07, 19/16, B42D 15/10
- (21) International Application Number: PCT/US00/24371
- (22) International Filing Date: 5 September 2000 (05.09.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
 

60/153,112	7 September 1999 (07.09.1999)	US
60/160,519	20 October 1999 (20.10.1999)	US
60/167,405	24 November 1999 (24.11.1999)	US
- (71) Applicant: AMERICAN EXPRESS TRAVEL RELATED SERVICES COMPANY, INC. [US/US]; American Express Tower, World Financial Center, New York City, NY 10285-4900 (US).
- (72) Inventors: FAENZA, William, J., Jr.; 5606 Davis Ford Road, Manassas, VA 22110 (US). LASCH, Ellen; 255 West 85th Street, New York City, NY 10024 (US). WEBB, Lisa; 121 Leroy Avenue, Darien, CT 06820 (US). VIGILETTI, Judy; 30 Applebee Farm Road, Croton on Hudson, NY 10520 (US).
- (74) Agent: SOBELMAN, Howard, I.; Snell & Wilmer L.L.P., One Arizona Center, 400 East Van Buren, Phoenix, AZ 85004-2202 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian

[Continued on next page]

(54) Title: TRANSPARENT TRANSACTION CARD WITH INFRARED BLOCKING LAYER

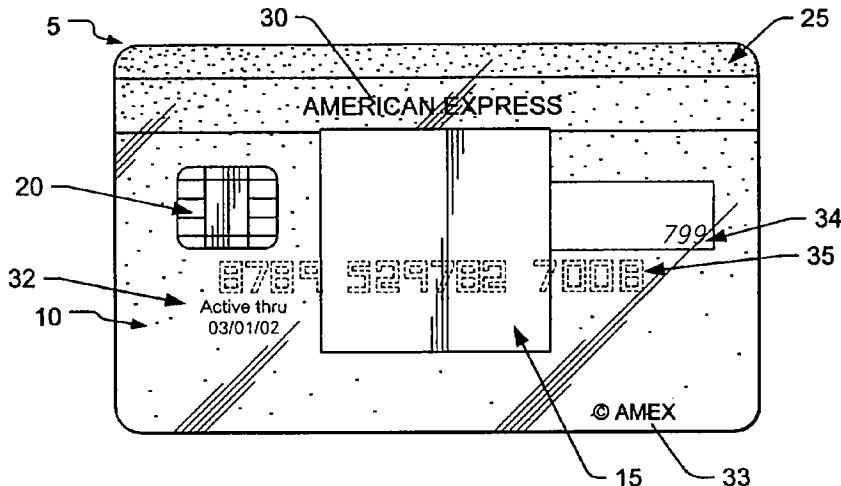

WO 01/018745 A3

(57) Abstract: The present invention relates to a process for producing an opaque, transparent or translucent transaction card having multiple features, such as a holographic foil, integrated circuit chip, silver magnetic stripe with text on the magnetic stripe, opacity gradient, an invisible optically recognizable compound, a translucent signature field such that the signature on back of the card is visible from the front of the card and an active thru date on the front of the card. The invisible optically recognizable compound is an infrared ink and/or film, which can be detected by a sensor found in an ATM or card assembly line.





patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**(48) Date of publication of this corrected version:**

26 September 2002

**Published:**

— *with international search report*

**(15) Information about Correction:**

see PCT Gazette No. 39/2002 of 26 September 2002, Section II

**(88) Date of publication of the international search report:**

13 September 2001

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## TRANSACTION CARD

### Technical Field of the Invention

5 The present invention relates generally to a transaction card, and more particularly, to the fabrication and use of an optically recognizable transparent or translucent transaction card that may contain a hologram, magnetic stripe or integrated circuit as well as other transaction card constituents.

### Background of the Invention

10 The proliferation of transaction cards, which allow the cardholder to pay with credit rather than cash, started in the United States in the early 1950s. Initial transaction cards were typically restricted to select restaurants and hotels and were often limited to an exclusive class of individuals. Since the introduction of plastic credit cards, the use of transaction cards have rapidly proliferated from the United States, to  
15 Europe, and then to the rest of the world. Transaction cards are not only information carriers, but also typically allow a consumer to pay for goods and services without the need to constantly possess cash, or if a consumer needs cash, transaction cards allow access to funds through an automatic teller machine (ATM). Transaction cards also reduce the exposure to the risk of cash loss through theft and reduce the need for  
20 currency exchanges when traveling to various foreign countries. Due to the advantages of transaction cards, hundreds of millions of cards are now produced and issued annually, thereby resulting in need for companies to differentiate their cards from competitor's cards.

Initially, the transaction cards often included the issuer's name, the cardholder's  
25 name, the card number, and the expiration date embossed onto the card. The cards also usually included a signature field on the back of the card for the cardholder to provide a signature to protect against forgery and tempering. Thus, the initial cards merely served as devices to provide data to merchants and the only security associated with the card was the comparison of the cardholder's signature on the card  
30 to the cardholder's signature on a receipt along with the embossed cardholder name on the card. However, many merchants often forget to verify the signature on the receipt with the signature on the card.

Due to the popularity of transaction cards, numerous companies, banks, airlines, trade groups, sporting teams, clubs and other organizations have developed

their own transaction cards. As such, many companies continually attempt to differentiate their transaction cards and increase market share not only by offering more attractive financing rates and low initiation fees, but also by offering unique, aesthetically pleasing features on the transaction cards. As such, many transaction

5 cards included not only demographic and account information, but the transaction cards also include graphic images, designs, photographs and security features. A recent security feature is the incorporation of a diffraction grating, or holographic image, into the transaction card which appears to be three dimensional and which

10 substantially restricts the ability to fraudulently copy or reproduce transaction cards because of the need for extremely complex systems and apparatus for producing holograms. A hologram is produced by interfering two or more beams of light, namely an object beam and reference beam, onto a photoemulsion to thereby record the interference pattern produced by the interfering beams of light. The object beam is a coherent beam reflected from, or transmitted through, the object to be recorded, such

15 as a company logo, globe, character or animal. The reference beam is usually a coherent, collimated light beam with a spherical wave front. After recording the interference pattern, a similar wavelength reference beam is used to produce a holographic image by reconstructing the image from the interference pattern.

However, in typical situations, a similar laser beam is not available to

20 reconstruct the image from the interference pattern on the card. As such, the hologram should be able to be viewed with ordinary, white light. Thus, when a hologram is recorded onto a transaction card, the image to be recorded is placed near the surface of the substrate to allow the resulting hologram to be visible in ordinary, white light. These holograms are known as reflective surface holograms or rainbow

25 holograms. A reflective hologram can be mass-produced on metallic foil and subsequently stamped onto transaction cards. Moreover, the incorporation of holograms onto transaction cards provides a more reliable method of determining the authenticity of the transaction card in ordinary white light, namely by observing if the hologram has the illusion of depth and changing colors.

30 Administrative and security issues, such as charges, credits, merchant settlement, fraud, reimbursements, etc., have increased due to the increasing use of transaction cards. Thus, the transaction card industry started to develop more sophisticated transaction cards which allowed the electronic reading, transmission, and authorization of transaction card data for a variety of industries. For example,

magnetic stripe cards, optical cards, smart cards, calling cards, and supersmart cards have been developed to meet the market demand for expanded features, functionality, and security. In addition to the visual data, the incorporation of a magnetic stripe on the back of a transaction card allows digitized data to be stored in machine readable form. As such, magnetic stripe reader are used in conjunction with magnetic stripe cards to communicate purchase data received from a cash register device on-line to a host computer along with the transmission of data stored in the magnetic stripe, such as account information and expiration date.

Due to the susceptibility of the magnetic stripe to tampering, the lack of confidentiality of the information within the magnetic stripe and the problems associated with the transmission of data to a host computer, integrated circuits were developed which could be incorporated into transaction cards. These integrated circuit (IC) cards, known as smart cards, proved to be very reliable in a variety of industries due to their advanced security and flexibility for future applications.

As magnetic stripe cards and smart cards developed, the market demanded international standards for the cards. The card's physical dimensions, features and embossing area were standardized under the International Standards Organization ("ISO"), ISO 7810 and ISO 7811. The issuer's identification, the location of particular compounds, coding requirements, and recording techniques were standardized in ISO 7812 and ISO 7813, while chip card standards were established in ISO 7813. For example, ISO 7811 defines the standards for the magnetic stripe which is a 0.5 inch stripe located either in the front or rear surface of the card which is divided into three longitudinal parallel tracks. The first and second tracks hold read-only information with room for 79 alpha numeric characters and 40 numeric characters, respectively. The third track is reserved for financial transactions and includes enciphered versions of the user's personal identification number, country code, currency units, amount authorized per cycle, subsidiary accounts, and restrictions. More information regarding the features and specifications of transaction cards can be found in, for example, Smart Cards by Jose Luis Zoreda and Jose Manuel Oton, 1994; Smart Card Handbook by W. Rankl and W. Effing, 1997, and the various ISO standards for transaction cards available from ANSI (American National Standards Institute), 11 West 42nd Street, New York, NY 10036, the entire contents of all of these publications are herein incorporated by reference.

The incorporation of machine-readable components onto transactions cards encouraged the proliferation of devices to simplify transactions by automatically reading from and/or writing onto transaction cards. Such devices include, for example, bar code scanners, magnetic stripe readers, point of sale terminals (POS), automated teller machines (ATM) and card-key devices. With respect to ATMs, the total number of ATM devices shipped in 1999 is 179,274 (based on Nilson Reports data) including the ATMs shipped by the top ATM manufacturers, namely NCR (138-18 231st Street, Laurelton, New York 11413), Diebold (5995 Mayfair, North Canton, Ohio 44720-8077), Fujitsu (11085 N. Torrey Pines Road, La Jolla, California 92037), Omron (Japan), OKI (Japan) and Triton.

Many of the card acceptance devices require that the transaction card be inserted into the device such that the device can appropriately align its reading head with the relevant component of the transaction card. Particularly, many ATMs require that a transaction card be substantially inserted into a slot in the ATM. After insertion of the card into the slot, the ATM may have an additional mechanical device for further retracting the transaction card into the ATM slot. To activate the ATM, the ATM typically includes a sensor, such as a phototransistor and a light emitting diode (LED), which emits light onto a card surface and the phototransistor receives light from the LED. A card blocks the infrared radiation from the phototransistor, therefore indicating that a card has been detected. A typical LED in an ATM is an IRED (infrared emitting diode) source having a wavelength in the range of about 820-920 nm or 900-1000 nm (see Figure 5), which is not present in ambient light at the levels needed by a phototransistor sensor. The spectral sensitivity curve of the typical phototransistor is in the range of about 400 nm - 1100 nm (see Figure 6). However, the visible spectrum is about 400 nm - 700 nm, and the spectral sensitivity of the phototransistor is about 60% at 950 nm and 90% at 840 nm. Thus, visible light is not part of the analog-to-digital algorithm. Moreover, ISO 7810, clause 8.10 requires that all machine readable cards have an optical transmission density from 450 nm - 950 nm, greater than 1.3 (less than 5% transmission) and from 950 nm - 1000 nm, greater than 1.1 (less than 7.9% transmission).

For the card to be detected by the ATM, the light is typically blocked by the card body. Moreover, the amount of light necessary to be blocked by a card is related to the voltage data received from the analog to digital conversion. The voltage range of the sensor is typically in a range of about 1.5V to 4.5V. When a card is inserted into a

sensor, the voltage drops to less than 1.5V indicating the presence of a card in the transport system. After the card is detected by the phototransistor, the magnetic stripe reader scans the magnetic stripe and acquires the information recorded on the magnetic stripe. A manufacturer of the LED sensor device in an ATM is, for example,  
5 Omron and Sankyo-Seiki of Japan, 4800 Great America Parkway, Suite 201, Santa Clara, California 95054.

As previously mentioned, transaction cards and readers typically follow various ISO standards which specifically set forth the location of card data and compounds. However, because numerous companies produce different versions of ATMs, the  
10 location of the sensor within the ATM is not subject to standardization requirements. In the past, the varying locations of the sensor within the ATM did not affect the ability of the ATM to sense the transaction card because the transaction card included a substantially opaque surface, such that any portion of the opaque transaction card could interrupt the IRED emission and activate the insert phototransistor. However,  
15 more recently, to provide a unique image, and to meet consumer demand, companies have attempted to develop transparent or translucent transaction cards. The use of a transparent card would often not activate the insert phototransistor because the IRED emission would not sufficiently reflect off of a transparent surface, so the radiation would simply travel through the card and become detected by the phototransistor. The  
20 machine, therefore, could not detect the presence of the card, and often jammed the equipment.

In an attempt to solve this problem, companies have printed opaque areas onto transparent cards in an effort to provide an opaque area to activate the input sensors on ATMs. However, due to the aforementioned variations in the location of the sensor  
25 in many ATMs, the use of limited opaque areas on a transparent card did not allow the card to activate the sensor in a sufficient number of ATMs. Alternatively, companies attempted to incorporate a lens onto a transaction card in an effort to redirect the LED light. However, during the card manufacture process, which often involves substantial pressure and heat, the lensing surface would be disrupted or destroyed. As such, a  
30 need exists for a transparent or translucent transaction card which is capable of activating an input sensor, wherein the input sensor may interface the card in a variety of locations.

Furthermore, during the card fabrication process, the cards must be detected on the assembly line in order to accurately count the number of cards produced during a

predetermined time interval. To count the cards, typical card fabrication assembly lines include counters with LED sensors, similar to the ATM sensors, which count the cards based upon the reflection of the LED light beam off of the opaque card surface. The production of transparent transaction cards suffers from similar limitations as ATM  
5 devices in that the LED beam does not reflect or is not sufficiently absorbed from a transparent surface. Thus, a transparent card is needed that can be produced on existing assembly lines. Similar problems exist when cards are punched to final dimensions.

Although existing systems may allow for the identification and detection of  
10 articles, most contain a number of drawbacks. For example, identification features based on UV, visible light detection, etc. are sometimes difficult to view, often require certain lighting requirements and typically depend on the distance between the article and the detection device. Additionally, the use of certain types of plastic, paper or other material which contain the identification mark may be limited by the particular  
15 identification device. For example, opaque materials typically deactivate the phototransistors in ATM's by blocking light in both the visible (near IR) and far IR light regions. Furthermore, the incorporation of a detection or authentication feature into a card product requires a separate material or process step during the card fabrication process. The incorporation of a new material or process step often requires expensive  
20 modifications to current equipment or new equipment and often extends the time for fabricating the card product.

#### **Brief Summary of the Invention**

The present invention relates to a process for producing a transparent or  
25 translucent transaction card having any one or more features, such as a holographic foil, integrated circuit chip, silver magnetic stripe with text on the magnetic stripe, opacity gradient, an optically recognizable ink or film contained within the construction of the card, a translucent signature field such that the signature on back of the card is visible from the front of the card and an "active thru" date on the front of the card. The  
30 card is optically recognizable due to an invisible or transparent infrared ink or film which is distributed over the card's surface, thereby allowing the card to block (absorb, refract, diffuse and/or reflect) infrared light and transmit all other light. Particularly, when the transaction card is inserted into an ATM device, the light beam from the IRED is blocked by the infrared ink or film, thereby deactivating the phototransistor.

Moreover, during the manufacturer of transaction cards, the optically recognizable card allows an IRED light beam from a personalization device, inspection unit or counter device to count the number of transaction cards produced in an assembly line.

5

### **Brief Description of the Drawing Figures**

A more complete understanding of the present invention may be derived by referring to the detailed description and claims when considered in connection with the following illustrative figures, which may not be to scale. In the following figures, like reference numbers or steps refer to similar compounds throughout the figures.

10 Figure 1 is a front view of an exemplary transaction card in accordance with an exemplary embodiment of the present invention;

Figure 2 is a back view of an exemplary transaction card in accordance with an exemplary embodiment of the present invention;

15 Figure 3 is a flow diagram of the card fabrication process in accordance with an exemplary embodiment of the present invention;

Figure 4 is a graph of energy v. wavelength for the reflection and transmission of IR film in accordance with an exemplary embodiment of the present invention;

20 Figure 5 is a graph of a typical IRED (infrared emitting diode) source in an ATM having a wavelength in the range of about 820-920 nm or 900-1000 nm in accordance with an exemplary embodiment of the present invention;

Figure 6 is a graph of a spectral sensitivity curve of a typical phototransistor having a wavelength in the range of about 400 nm - 1100 nm in accordance with an exemplary embodiment of the present invention;

25 Figures 7A-7F show various embodiments of card layers in accordance with an exemplary embodiment of the present invention;

Figure 8 is a schematic diagram of an exemplary sensor mechanism within an ATM in accordance with an exemplary embodiment of the present invention;

30 Figure 9 is an exemplary reflection and transmission monitor with various optical components for vacuum evaporation in-line roll coating operations for monitoring the IR film in accordance with an exemplary embodiment of the present invention;

Figure 10 shows an exemplary system for chemical vapor deposition of PET film in accordance with an exemplary embodiment of the present invention;

Figure 11 shows exemplary embodiments of layers for card construction in accordance with an exemplary embodiment of the present invention;



Figure 12A shows exemplary film bond strengths on a graph of strength (lb/in) v. film bond for various film bonds in accordance with an exemplary embodiment of the present invention;

Figure 12B shows exemplary bond strengths at the film interfaces on a graph of strength (lb/in) v. film interface for various film interfaces in accordance with an exemplary embodiment of the present invention;

Figure 13 shows exemplary IR ink ingredients which exhibit a green color in accordance with an exemplary embodiment of the present invention;

Figure 14 shows measurements related to these exemplary green cards in accordance with an exemplary embodiment of the present invention;

Figure 15 shows exemplary ATM test results for the exemplary green cards in accordance with an exemplary embodiment of the present invention;

Figure 16 shows an example of the transmission density of exemplary green cards in a graph of percent transmission v. wavelength in accordance with an exemplary embodiment of the present invention; and,

Figures 17A-17I show exemplary test results for various card embodiments in a graph of percent transmission v. wavelength (nm) in accordance with an exemplary embodiment of the present invention.

## **Detailed Description of Detailed Embodiments**

In general, the present invention allows for the identification and detection of various articles, wherein the articles include materials having machine recognizable compounds. The articles include, for example, transaction cards, documents, papers and/or the like. The materials include, for example, coatings, films, threads, plastics, inks, fibers, paper, planchettes, and/or the like.

In an exemplary embodiment, the machine recognizable compounds are optically recognizable compounds containing infrared blocking (absorbing, refracting, diffusing, reflecting or otherwise blocking) ingredients. The optically recognizable compounds may be invisible, visible, or colored to produce a desired effect and/or they may contain other detectable compounds, such as, for example, UV-Fluorescent or IR-Fluorescent features. The optical compounds preferably have good stability, resistance properties, durability and other physical properties, such as good appearance, flexibility, hardness, solvent resistance, water resistance, corrosion resistance and exterior stability. Moreover, the use of such compounds typically does not interfere

with UV compounds that may be present in many substrates. One skilled in the art will appreciate that the optically recognizable compound is any chemical, solution, dye, ink substrate, material and/or the like which is recognizable by a sensor. In an exemplary embodiment, the optically recognizable ink is an infrared ink which blocks, absorbs or reflects most infrared light, but transmits most other wavelengths of light.

In an exemplary embodiment, the optically recognizable compound is incorporated into a material in the form of a film, plastic, fiber, ink, concentrate, thermoplastic or thermoset matrix, thread, planchette, and/or other medium which contains in the range of about 0.001 to 40.0 wt.(%) of a compound derived from organic or inorganic materials. The infrared ink may be applied to card 5 (see Figure 1) by, for example, a screen printing process or any other printing or coating means such as lithography, gravure, flexo, calender coating, curtain coating, roller coating and/or the like. An exemplary screen printing process utilizes a screen press equipped with drying equipment (UV curable or convection heat) and a screen with a specific mesh size of about 80 lines/cm. The IR ink is printed across any portion of the entire card surface of plastic using a silk screen press, as described below.

Because the relative eye sensitivity of an ordinary observer for a specified level of illumination is between around 400-770nm, infrared ink at over 770nm is preferable because it is invisible to the human eye in normal white light. As such, the invisible infrared material will not substantially obscure the transparent surface of card 5. Additionally, the exemplary ink withstands card production temperatures of about 200F to 400F degrees and includes a "light fastness period" (which is the resistance of the ink to fade or degrade in the presence of any light, and specifically, UV light) of about at least three years under normal credit card usage conditions. Moreover, the exemplary ink blocks, absorbs or reflects the spectral output of IRED's, such as, for example, the Sankyo Seiki LED's, which is about 800-1000 nm. The exemplary ink also limits the light reaching the phototransistors, so the presence of a clear card having the ink is detected in a transaction machine, such as, for example, a card grabbing-type ATM machine.

Exemplary compositions of the machine recognizable compounds of the present invention comprise a mixture of a wide variety of compounds. The active compounds are derived of inorganic, organometallic, or organic layered materials or rare earth compounds, most commonly rare earth oxides, oxysulfides or oxyhalides. The compounds are relatively inert, so the effects on the performance properties of the final

product are minimized. The infrared compound comprises either a dye, layered material, pigment and/or encapsulated pigment that is dispersed in a particular medium which can be incorporated into a wide variety of end-usable products. The particle size of the infrared compound allows the materials (plastic, thread, ink, etc.) to  
5 optimally dispersed or dissolved and uniformly exist within the articles which it is incorporated.

Conventionally known infrared materials comprising layered dielectric and metallic materials or doped rare-earth materials can be effectively used as pigments for compounds in accordance with exemplary embodiments of the present invention.  
10 In this context, the pigments or dyes absorb specific wavelengths of energy and may change one wavelength of energy to another. The energy conversions or absorptions may be above or below any stimulation within the electromagnetic spectrum. The compounds may absorb specific wavelengths of light or change from one color to another or the compounds may change from invisible to visible and/or the like. The  
15 infrared compounds of the present invention are thus incorporated into a system which reversibly changes one wavelength of energy to another, hence causing a "fingerprint"-type of detectable feature within the articles.

Moreover, the prepared films or materials can be mixed with a binder to form infrared compounds for use in threads, fibers, coatings, and the like. Binders that can  
20 be incorporated in the present invention include conventional additives such as waxes, thermoplastic resins, thermoset resins, rubbers, natural resins or synthetic resins. Such examples of such binders are, polypropylene, nylon, polyester, ethylene-vinyl acetate copolymer, polyvinyl acetate, polyethylene, chlorinated rubber, acrylic, epoxy, butadiene-nitrile, shellac, zein, cellulose, polyurethane, polyvinylbutyrate, vinyl  
25 chloride, silicone, polyvinyl alcohol, polyvinyl methyl ether, nitrocellulose, polyamide, bismaleimide, polyimide, epoxy-polyester hybrid and/or the like. Films that can be used include polyester, polyvinylchloride, polypropylene, polyethylene, acrylic, polycarbonate and/or the like. As discussed below, any film can be laminated or adhered to common card articles using heat, adhesives, or a combination of both.

30 If the content of the compound is too low, adequate blocking may not be achieved and the phototransistor may not send the proper signal to the capture device, which will mean that the card will not be detected. Therefore, the infrared compounds are usually present in the composition at a total amount from about 1 PPM to 80.0 wt.(%), and preferably from about 0.25% - 25.0% by weight. Moreover, the present

invention contemplates that other materials such as, for example, UV absorbers, reflectors, antioxidants, and/or optical brighteners, may be added in order to achieve better resistance properties, aesthetics, or longevity of the materials.

Particularly, other materials may be added to allow for color shifts from one color to another color after stimulation. Commonly employed materials such as dyes, pigments, fluorescent dyes, luminous pigments, and/or the like, can be used to promote reversible color changes from one color state to another color state. Such materials can be incorporated directly with the infrared compounds during initial processing or may be added after the infrared compounds have been processed. The use of materials such as solvents, water, glycols, and/or the like can be added to adjust rheological properties of the material. Also, the use of surfactants, defoamers, release agents, adhesion promoters, leveling agents, and/or the like may be added to the formulations for improved processing properties. Optical brightening materials may also be added to ensure whiteness in a colorless state and to maintain a low level of contrast between many substrates where infrared compounds are located.

Fibers of various materials are used either in a continuous manner or single fibers can be incorporated into a wide variety of materials. The present invention contemplates, for example, natural fibers, synthetic fibers, copolymer fibers, chemical fibers, metal fibers, and/or the like. Examples of these fibers may be nylon, polyester, cotton, wool, silk, casein fiber, protein fiber, acetylated staple, ethyl cellulose, polyvinylidene chloride, polyurethane, acetate, polyvinyl alcohol, triacetate, glass, wood, rock wool, carbon, inorganic fibers, and/or the like. Such fibers can be incorporated or mixed into other types of materials such as paper pulp, plastic label stock, plastic materials, and the like. Such materials can be used alone in a continuous manner or can be used as mono- or di-filaments in other materials.

Moreover, the infrared materials that are incorporated into plastics can be used with a wide variety of materials, such as, for example, nylon, acrylic, epoxy, polyester, bismaleimide, polyamide, polyimide, styrene, silicone, vinyl, ABS, polycarbonate, nitrile, and/or the like. As such, the compounds that are incorporated into fibers, plastics, film and/or the like, may be processed directly to a suitable form in a single- or multi-process application. Such compounds can be added into a formulation in the form of a single ingredient or in the form of a master-batch that is then processed in a similar manner to normal processing operations of compounds. Processing of such compounds includes the use of continuous mixers, two- or three-roll mills, extrusion,

and/or other melt-compounding methods of dispersion. While in an exemplary embodiment, the thread can be woven or non-woven, the infrared materials may be extruded directly into a thermoplastic matrix and drawn directly into the form of a thread that can be used in a continuous manner or sectioned in the form of a fiber or plastic film.

The exemplary infrared compounds are deposited onto films of various compositions and can be used in most card applications. Moreover, the infrared compounds in accordance with the present invention can be used alone or blended with other materials at ranges from 0.001 to 50.0 parts by weight, but most preferable from 1.0 to 15.0 parts by weight.

The present invention will now be illustrated in greater detail with reference to the following examples, comparative examples, test examples and use examples. As disclosed in the examples, tests and graphs herein, the resulting inks sufficiently block IR radiation from phototransistor detection. It is understood that the present invention is not limited thereto. For example, one skilled in the art will appreciate that, in any of the examples, the ink may contain other materials for different optical effects or authentication purposes.

#### EXAMPLE 1

The present example includes about 2% Epolin VII-164 dye and about 98% Tech Mark Mixing Clear, produced by Sericol, Inc.. 980.0g of Tech Mark solvent evaporative screen ink is mixed on a high-speed disperser. While mixing, 20.0g of Epolight VII-164 dye is dissolved completely. The resulting ink has a viscosity of about 3.2 Pa.S at 25C degrees and is printed using a screen process. The screen process includes a 305 polymer screen onto both sides of clear PVC 13.0 mil film.

#### EXAMPLE 2

The following ink was produced by adding about 15.0 lbs of Epolight VII-164 and about 20.0 lbs of Epolight VI-30 to about 965 lbs. of TM Mixing Clear. The mixture was dispersed for about 40 minutes. The resulting mixture was coated on PVC core plastic using an 80 line/cm polyester screen. The resulting coating exhibited high absorbtivity from 780 nm to 1070 nm with low visible absorption. Card core, magnetic stripe and lamitate were assembled and the entire assembly was placed in Burckle Stack Lamination Unit at a temperature of about 280 F.

## EXAMPLE 3

A concentrate of about 30.0 g. Epolight VII-172 was blended with about 700.0 g. of polyvinylchloride plastic. The resulting mixture was extruded at about 260F, air cooled and pelletized. About 1.0 lb of the resulting pellets were combined with about 99.0 lbs of PVC. Klockner Pentaplast provided calendered sheets of approximately .013 inches. Cards were fabricated using said sheets. These cards exhibited sufficient absorption in the IR region from 800 nm to 1000 nm. The cards were detected by a Sankyo ATM capture device.

10

## EXAMPLE 4

Multi-Layer PET plastic with sufficient optical properties was combined into a card construction. The PET plastic was provided by 3M Co. (Minneapolis, MN). The resultant card exhibited sufficient optics such that an ATM device detected the card.

15

## ADDITIONAL EXAMPLES

Additional examples of IR ink formulations are disclosed in Figure 13. The IR ink examples in Figure 13 exhibit a visible green color. Moreover, Figure 14 shows measurements related to these exemplary cards, including, for certain wavelength ranges, transmission density, ATM readability and ISO compliance. Figure 15 shows exemplary test results for the exemplary green cards wherein samples of the cards were inserted into ATMs of various manufacturers. The tests resulted in positive ATM detection of the exemplary cards. Furthermore, Figure 16 shows an example of the transmission density of exemplary green cards in a graph of percent transmission v. wavelength (the graph also indicates the ISO specifications for the card).

20

Figures 17A-17I show exemplary test results for various card embodiments in a graph of percent transmission v. wavelength (nm). For example, with respect to Figure 17A, the quality assurance of IR ink on PVC with no text is tested wherein a curve represents one of four corners of an exemplary card. Subsequent curves represent another card sample which was selected after an interval of card production, such as, for example, after about 50 cards. Figure 17B shows the percent transmission of different wavelengths of light through cards having different ink formulations, wherein each curve represents a card with a different ink formulation.

30

Figures 17C – 17I represent various spectra of films, coatings, cards, etc. which demonstrate the ability of the materials used in the card constructions to block sufficient quantities of infrared radiation and transmit visible light in order to produce cards described in the embodiment. The mechanism of blocking may be absorption,  
5 reflection, diffusion, dispersion or other methods of blocking radiation in the electromagnetic spectrum.

In addition to the IR inks, the optically recognizable compound may alternatively be a film or hot mirror which also blocks (absorbs or reflects) infrared light, but transmits all other wavelengths of light. In an exemplary embodiment, the film is set  
10 between the front sheet 10 and back sheet 12. Figure 4 is a graph of energy v. wavelength for the reflection and transmission of an exemplary IR film in accordance with an exemplary embodiment of the present invention. Figure 4 shows that, while the visible light is transmitted through the film, the infrared light is blocked at higher wavelengths and a substantial amount of infrared light is reflected.

The optically recognizable compounds may be incorporated into plastic  
15 products, films, products, documents or other articles which may inhibit detection via phototransistors, CCD's, and/or the like. The material can be incorporated into a transaction card via a film, plastic, printing ink, coating or other application medium by grinding or the use of dispersed or deposited material into a liquid, paste or other type  
20 of medium. To minimize environmental damage to the ink, such as the ink being scratched, the ink is preferably applied directly onto the plastic sheets under the laminate (described below in step 170). Moreover, the infrared ink may be applied on the inside or outside surface of the plastic sheets.

In an exemplary embodiment, incorporating the optically recognizable  
25 compound into an article may not require a separate printing unit, modifications to existing processing equipment or an additional operational step. Particularly, the fabrication of the articles, such as a transaction card, utilizes existing equipment which incorporate colorants anyway, so the application of the optically recognizable compounds to the existing colorants do not add extra equipment or steps to the  
30 process.

In a further exemplary embodiment, the optically recognizable compounds block light which is detectable by machines. More particularly, the machines suitably detect the presence of a card via infrared interference at one or several wavelengths. In an exemplary embodiment, detection of materials may include the production of a visual

effect when the materials are interrogated with invisible infrared radiation from the proper instrument, and when such radiation contacts the infrared material, a visual effect, such as a colored light, can be seen.. Alternatively, the materials may be detected by a remote detector that will indicate the presence of the materials.

5 Detection or authentication of the materials occurs above and below the stimulation wavelength of the reading device. As such, once the optically recognizable material has been detected, the detection device may then provide the user with a positive identification signal, which is preferably located on or near the detection device.

In an exemplary embodiment, the detection of IR materials trigger the sensors  
10 in ATM machines. In particular, with respect to Figure 8, the present invention allows for the passage of a greater percentage of visible light (from about 400 nm to 700 nm), which allows the card to appear translucent in nature, while allowing for the blockage of certain light (from about 700 nm and above) to allow the phototransistors in ATM's to detect that a card has been inserted into the carriage mechanism. As discussed  
15 above, an exemplary ATM sensing device includes an IRED, a filter and a phototransmitter.

In addition to triggering the sensors in ATM machines, translucent card 5 can be used with any magnetic stripe or smart card reader. The reader system can include a card reader/writer, a point-of-sale terminal, ATM or any other acceptance device. In an  
20 exemplary embodiment, card 5 is used in conjunction with a reader which, not only detects the existence of the card, but also illuminates the transparent portion of card 5 when the card is inserted into the reader. The illumination source can be either an incandescent or solid state source (infrared emitting diode or laser). In operation, when the card is inserted into the acceptance device, the edge of the card presses  
25 against the illumination assembly (or activates a switch, interrupts a beam, etc.). Depending upon the application of the card, the illumination source can be under the control of the acceptance device or external software. Thus, the illumination source can flash or display a particular color if directed by the external software program. Additionally, depending on the structure of the card, the illumination source could be  
30 used to excite an embedded design useful for security or product enhancement.

As discussed above, the optically recognizable compounds may be incorporated into any type of article. An exemplary article is a transaction card which may itself include any number of numerous features. In an exemplary embodiment, the present invention includes, generally, a transaction card 5 comprised of base



containing opaque, transparent or translucent plastic layers 10, 12 and multiple features affixed to the card 5 such as text 30, 32, 34, logos 50, embossed characters 35, magnetic stripe 42, signature field 45, holographic foil 15, IC chip 20 and opacity gradient 25 (Figures 1 and 2).

5 Card 5 also includes an optically recognizable compound, described above, for allowing the transparent or translucent transaction card 5 to be recognized by card reading devices, such as ATMs, and/or for allowing the transparent transaction card 5 to be recognized and counted during card fabrication. The optically recognizable compound on transparent card 5 is a substantially invisible or translucent infrared ink,  
10 mirror or film which blocks (absorbs or reflects) infrared light but transmits all other wavelengths of light (see Figure 4). Card 5 can be used for credit, charge, debit, access, identification, information storage, electronic commerce and/or other functions.

With respect to Figure 3, to fabricate card 5 having a front and back surface in accordance with an exemplary embodiment of the present invention, a front sheet 10  
15 and back sheet 12 (Figures 1 and 2) consisting of a plastic substrate such as, for example, clear core PVC, are produced (step 100). One skilled in the art will appreciate that sheets 10 and 12 of card 5 may be any suitable transparent, translucent and/or opaque material such as, for example, plastic, glass, acrylic and/or any combination thereof. Each sheet 10, 12 is substantially identical and is preferably  
20 about 3' X 4' (622mm X 548mm) and about 0.005-0.350 inches, or more preferably 0.01-0.15 inches or 13.5 mil thick.

With respect to Figure 7A, the fabrication of the individual card sheets includes either direct layout (9 layers) of film or the use of a sub-assembly (5 layers). An exemplary sub-assembly consists of 5 layers of film with room temperature tack  
25 adhesive applied over thermoset and thermoplastic adhesives. The resulting cards comprise (from the card front towards the card back) 2.0 mil outer laminate (PVC, polyvinylchloride) having the holographic foil, embossed surface, chip and other indicia on its surface, 9.0 mil printed PVC core with print side out (card front), 2.0 mil PVC adhesive, 1.7 mil PET GS (extrusion coated polyethyleneterephthalate -  
30 gluable/stampable) manufactured by D&K (525 Crossen, Elk Grove Village, IL 60007), 2.0 mil PET IR blocking film, 1.7 mil PET GS, 2.0 mil PET adhesive, 9.0 mil printed PVC core with the print side out (card back), and 2.0 mil outer back laminate with a signature panel, applied magnetic stripe and other indicia. Optimally, the PET IR blocking film is fabricated in the middle of the layers to balance the card and minimize

warping of the resulting card product. Other exemplary embodiments of the layers are shown in Figures 7B – 7F. Moreover, Figure 11 details exemplary embodiments of layers/sheets for card construction, including layer number, material, layer thickness (in mil), source/manufacturer of the material, comments regarding bond strength data and total thickness (in mil). Additionally, with respect to Figure 12A, the film bond strength is indicated on a graph of strength (lb/in) v. film bond for various film bonds. With respect to Figure 12B, the bond strength at the film interfaces is indicated on a graph of strength (lb/in) v. film interface for various film interfaces.

After eventually combining the sheets (step 160), by preferably adhering the front sheet 10 on top of the back sheet 12, the total thickness of the transaction card 5 is about .032 in. (32 mil.), which is within the ISO thickness standard for smart cards. Because the IC chip 20 is eventually embedded into the surface of the substrate (step 195), and the surface of chip 20 is co-extensive with the outer surface of the front sheet 10, the IC chip 20 does not affect the thickness of the overall card 5. Moreover, the about 3' X 4' sheets include markings which define the boundaries of the individual cards 5 which will be cut from the sheet. Each exemplary sheet yields over 50 transaction cards (typically 56 cards), wherein each card 5 is within the ISO card size standard, namely about 2" X 3.5".

In general, an exemplary process for construction of card 5 having an IR film includes chemical vapor deposition of PET film which has optimal visible and infrared properties (step 105). The chemical deposition is preformed by a Magnetron Machine manufactured by the Magnetron Company. With respect to Figure 10, the process incorporates a roll chemical vapor deposition sputtering system with three coating zones. The Magnetron roll vapor deposition machine deposits evaporation batches containing Ag, Au and Indium oxide onto optical grade polyethyleneterephthalate using chemical vapor deposition. The Ag/Au/Indium layers are about 100 angstroms each and, depending on the lower wavelength reflections, about three to five layers exist. More details related to vacuum coating, solar coating and Magnetron sputtering can be found in, for example, "Handbook of Optical Properties, Volume I, Thin Films for Optical Coatings" edited by Rolf Hummel and Karl H. Guenther, 1995, CRC Press, Inc, the entire contents of which is hereby incorporated by reference.

Next, plasma or flame treatment is applied to the PET film for surface tension reduction of the film (step 110). During the deposition and assembly of the layers, the IR film is monitored to optimize the IR blocking spectrum. Thus, the film is then tested

against a standard by using a spectrophotometer to test the visible and infrared properties of the PET film (step 115). With respect to Figure 9, a reflection and transmission monitor with various optical components for vacuum evaporation in-line roll coating operations is utilized to monitor the IR film. In-line spectrophotometric  
5 monitoring is part of the vapor deposition process. Transmission at various wavelengths is monitored during the entire run. A tack adhesive is applied to PET GS (polyethyleneterephthalate - gluable/stampable) (step 120) and a pressure laminate is applied to the Indium Oxide metal surface of the PET IR blocking film (step 125). Next, a tack adhesive is applied to the PET side of the IR blocking film (step 130) and a  
10 pressure laminate is applied to the PET GS (step 135). Exemplary lamination conditions include 280F degrees and 600 psi for 22 minutes, then cooled under pressure for about 18 minutes. A heat seal adhesive is applied to both outer sides of the PET GS, or alternatively, a PVC adhesive is applied to both outer sides of the PET GS (step 140).

15 In an exemplary embodiment, certain compounds are printed over the surface of sheets 10 and 12. One skilled in the art will appreciate that the printing of the text 30, 32, 34, logos 50, optically recognizable ink and opacity gradient 25 may be applied to any surface of card 5 such as, for example, the front 10 face, the rear 12 face, the inside or outside surface of either face, between the two sheets of base material and/or  
20 a combination thereof. Moreover, any suitable printing, scoring, imprinting, marking or like method is within the scope of the present invention.

The opacity gradient 25 and optically recognizable ink are printed onto the sheets by a silk screen printing process (step 150). With respect to the opacity gradient 25, the exemplary gradient is comprised of a silver pearl ink gradation having  
25 an ink stippling which is more dense at the top of card 5 and gradually becomes less dense or clear as it approaches the bottom of card 5. One skilled in the art will appreciate that the opacity gradient 25 can be any density throughout the gradient 25 and the gradient 25 can traverse any direction across card 5 face. The opacity gradient 25 can be formed by any substance which can provide a similar gradient 25 on card 5.  
30 The exemplary ink gradient 25 for each card 5 is printed using known printing inks suitably configured for printing on plastic, such as Pantone colors. In an exemplary embodiment, the ink used for the stippling 25 is a silver pearl ink and is applied to the outside surface of each plastic sheet. Ink gradient 25 is printed on the surface of each of the sheets using a silk screen printing process which provides an opaque, heavier

ink coverage or using offset printing process which provides halftone images in finer detail. The words "American Express" are printed in Pantone 8482 using a similar silkscreen process.

5 More particularly, with respect to silk screen printing, artwork containing the  
desired gradient 25 is duplicated many times to match the number of individual cards 5  
to be produced from the sheets. The duplicated artwork is then suitably applied to a  
screen by any suitable known in the art photo-lithographic process and the screen is  
then developed. The screen is placed over the sheet and ink is suitably washed  
10 across the surface of the screen. The exposed portions of the screen allow the ink to  
pass through the screen and rest on the sheet in the artwork pattern. If multiple colors  
are desired, this process can be repeated for each color. Moreover, other security  
features are optionally silk printed on card 5 such as, for example, an invisible,  
ultraviolet charge card logo (visible in black light) is printed in a duotone of Pantone  
307 and 297 using offset and silk screen presses.

15 The text 30, 32, 34 and logo 50 are printed on the outside surface of each sheet  
by a known printing process, such as an offset printing process (step 155) which  
provides a thinner ink coverage, but clearer text. More particularly, with respect to  
offset printing, the artwork is duplicated onto a metal plate and the metal plate is  
placed onto an offset press printing machine which can print up to four colors during a  
20 single run. The offset printed text includes, for example, a corporate name 30, a  
copyright notice 33, a batch code number 34, an "active thru" date 32, contact  
telephone numbers, legal statements (not shown) and/or the like. The exemplary  
offset text is printed in 4DBC in opaque white ink or a special mix of Pantone Cool  
Gray 11 called UV AMX Gray.

25 Because the resulting card 5 may be transparent, the text can be seen from  
both sides of card 5. As such, if the text is only printed on one sheet, the text may be  
obscured when viewing the text from the opposite side of card 5 (in other words,  
viewing the text "through" the plastic substrate). To minimize the obscuring of the text,  
the front sheet 10 is printed on its outside surface with standard format text and the  
30 back sheet 12 is printed on its outside surface with the same text, but the text is in  
"reverse" format. The back 12 text is aligned with the text on the front face 10, wherein  
the alignment of the text is aided by card 5 outline markings on the full sheet. Certain  
text or designs which may be obscured by an compound of card 5 (magnetic stripe 40,  
chip 20, etc.) may be printed on only one sheet. For example, in an exemplary

embodiment, the corporate logo 50 is printed on only one sheet and is located behind the IC chip 20, thereby being hidden from the front 10 view and hiding at least a portion of the IC chip 20 from the back 12 view. One skilled in the art will appreciate that any of the offset printing can occur on the outside or inside surface of the sheets.

5           The sheet of laminate which is applied to the back 12 of card 5 (step 170) preferably includes rows of magnetic stripes 40, wherein each magnetic stripe 40 corresponds to an individual card 5. The magnetic stripe 40 extends along the length of card 5 and is applied to the back 12 surface, top portion of card 5 in conformity with ISO standards for magnetic stripe 40 size and placement. However, the magnetic  
10 stripe 40 may be any width, length, shape, and placed on any location on card 5. The two track magnetic stripe 40, including the recorded information, can be obtained from, for example, Dai Nippon,1-1; Ichigaya Kagacho 1-chome, Shinjuku-ku, Tokyo 162-8001, Japan, Tel: Tokyo 03-3266-2111. In an exemplary embodiment, the magnetic stripe is applied to the outer laminate using a tape layer machine which  
15 bonds the cold peel magnetic stripe to the outer laminate roll with a rolling hot die and at suitable pressure. The roll is then cut into sheets at the output of the tape layer before the card layers are assembled and the stripe is fused to the card during the lamination process.

          Although prior art magnetic stripes 40 in current use are black, in a particularly  
20 exemplary embodiment, the magnetic stripe 40 of the present invention is a silver magnetic stripe 40. Exemplary silver magnetic stripe 40 is 2750 oersted and also conforms to ISO standards. Moreover, the silver magnetic stripe 40 includes printing over the magnetic stripe 40. The printing on the magnetic stripe 40 can include any suitable text, logo 50, hologram foil 15 and/or the like; however, in an exemplary  
25 embodiment, the printing includes text indicative of an Internet web site address. Dai Nippon Printing Co., Ltd (more information about Dai Nippon can be found at [www.dnp.co.jp](http://www.dnp.co.jp)) prints a hologram or text on the mag stripe using, for example, the Dai Nippon CPX10000 card printer which utilizes dye sublimation retransfer technology having a thermal head which does not contact the card surface. The card printer  
30 utilizes the double transfer technology to print the image with the thermal head over a clear film and then re-transferring the printed image onto the actual card media by heat roller. The printing of information on the surface of the magnetic stripe 40 is preformed by, for example, American Banknote Holographics, 399 Executive Blvd., Elmsford, NY 10523, (914) 592-2355. More information regarding the printing on the surface of a

magnetic stripe 40 can be found in, for example, U.S. Patent No. 4,684,795 issued on August 4, 1987 to United States Banknote Company of New York, the entire contents of which is herein incorporated by reference.

After the desired printing is complete and the magnetic stripe applied, the front  
5 10 and back 12 sheets are placed together (step 160), and the sheets are preferably  
adhered together by any suitable adhering process, such as a suitable adhesive. One  
skilled in the art will appreciate that, instead of printing on two sheets and combining  
the two sheets, a single plastic card 5 can be used, wherein card 5 is printed on one  
side, then the same card 5 is re-sent through the printer for printing on the opposite  
10 side. In the present invention, after adhering the sheets together, a sheet of  
lamination, approximately the same dimensions as the plastic sheets, namely 3' X 4',  
is applied over the front 10 and back 12 of card 5. After the laminate is applied over  
the front 10 and back 12 of the combined plastic sheets (step 170), card 5 layers are  
suitably compressed at a suitable pressure and heated at about 300 degrees, at a  
15 pressure of between 90-700 psi, with a suitable dwell time to create a single card 5  
device. The aforementioned card fabrication can be completed by, for example,  
Oberthur Card Systems, 15 James Hance Court, Exton, Pennsylvania.

In an exemplary embodiment, the card layers are fused together in a lamination  
process using heat and pressure. During the hot press phase, the press is heated to  
20 about 300F degrees and the pressure builds to about 1000 psi and holds for about 90  
seconds. The pressure then ramps up to about 350 psi over an about 30 second  
period and holds for 16 minutes at the same temperature, namely 300F degrees. The  
card is then transferred to a cold press which is at about 57F degrees. The pressure  
builds to about 400 psi and is held for about 16 minutes as chilled water of about 57F  
25 degrees is circulated in the plates. The cold press then unloads the card.

With respect to Figures 1 and 2, after the laminate is applied, a signature field is  
applied to the back surface 12 of card 5 (step 175) and the holographic foil 15 is  
applied to the front 10 of card 5 (step 190). With respect to signature field 45, although  
prior art signature fields are formed from adhering a paper-like tape to the back 12 of  
30 card 5, in an exemplary embodiment of the present invention, the signature field 45 is  
a translucent box measuring about 2" by 3/8" and is applied to the card using a hot-  
stamp process. The verification of the signature in signature field 45 by the merchant  
is often a card 5 issuer requirement for a merchant to avoid financial liability for  
fraudulent use of card 5. As such, the translucent signature field 45 on the transparent

card 5 not only allows the clerk to view at least a portion of the signature field 45 from the front of the card 5, but the signature view also encourages the clerk to turn over card 5 and verify the authenticity of the signature with the signed receipt.

After the card sheets are laminated, the sheets are cut into individual cards 5 (step 180) by a known stamping process, including any necessary curing, burrowing, heating, cleaning and/or sealing of the edges. The individual transaction cards 5 are about 3" X 4" and conform to ISO standards for transaction card 5 shape and size. In an exemplary embodiment, the laminated sheets of 56 cards are suitably cut in half on a gilloutine device, resulting in two half-sheets of 28 cards. The half-sheets are loaded onto a card punch machine which aligns the sheets to a die (x and y axes) using predetermined alignment marks visible to the optics of the machine. The half-sheets are then fed under the punch in seven steps. Particularly, a fixed distance feed is followed by another optic sensor search to stop the feed at the pre-printed alignment mark, then the machine punches a row of four cards out at one time. After die cutting and finishing according to standard processing, the IR reflection properties are verified in-line (step 185) before application of the holographic foil 15.

With respect to the application of an exemplary holographic foil, the holographic foil 15 is adhered to card 5 (step 190) by any suitable method. In an exemplary embodiment, a substantially square steel die, which is about 1-1/4" X 1-1/4" with rounded corners and a 0.0007" crown across the contacting surface, stamps out the individual foils 15 from a large sheet of holographic foil 15. The die is part of a hot stamp machine such that the die is sent through a sheet of foil 15, cutting the foil 15 around a particular image and immediately applying the foil 15 with heat to the front 10 surface of card 5 after the card has been laminated. The die temperature is in the range of about 300F° +/- 10F°. The dwell time is approximately 1/2 seconds and the application speed is set based upon the individual hot stamp applicator; however, the foregoing temperature and dwell is identified for a speed of 100 cards per minute. U.S. Patent Nos. 4,206,965; 4,421,380; 4,589,686; and 4,717,221 by Stephen P. McGrew provide more details about hot stamping of a holographic image and are hereby incorporated by reference.

With respect to the holographic foil 15, the foil 15 can be any color, contain any hologram, can be applied to any location on card 5, and can be cut to any size, shape and thickness. In an exemplary embodiment, the holographic foil 15 sheet preferably includes a gray adhesive on the bottom side and a blue, mirror-like, three-dimensional

holographic surface on the top side containing numerous holographic images about 1-1/4" X 1-1/4" each. The exemplary hologram includes a 360 degree viewability and diffracts a rainbow of colors under white light. The full color hologram is created by, for example, American Banknote Holographics.

5           The corners of the individual foil 15 are preferably rounded to minimize the likelihood that the foil 15 will peel away from the surface of card 5. Moreover, when applied to the card, the blue holographic surface faces away from card 5 while the gray adhesive side is applied to card 5 surface. The top surface of the holographic foil 15 may be created by any suitable method such as reflection holographics, transmission  
10 holographics, chemical washing, the incorporation of mirror compounds and/or any combination thereof. The holographic foil 15 can be fabricated by, for example, American Banknote Holographics, Inc. located at 1448 County Line Road, Huntingdon Valley, PA, 19006.

          The exemplary holographic foil includes various layers. One skilled in the art  
15 will appreciate that any ordering, combination and/or composition of these layers which provides a similar holographic effect is still within the scope of the present invention. In an exemplary embodiment, the holographic transfer foil structure includes the following layers: 90 gauge polyester carrier, release coat, embossable resin, vacuum deposited aluminum, tie coat and size coat. During the transfer process, the embossable resin,  
20 vacuum deposited aluminum, tie coat and size coat layers are deposited onto a substrate.

          In an exemplary embodiment, the sheets of holographic foil 15 are transmission holograms suitably created by interfering two or more beams of converging light, namely an object beam and reference beam, from a 20 watt Argon laser at 457.9 nm,  
25 onto a positive photoemulsion (spun coat plates using shiply photoresist). The system records the interference pattern produced by the interfering beams of light using, for example, a 303A developer. The object beam is a coherent beam reflected from, or transmitted through, the object to be recorded which is preferably a three-dimensional mirror. The reference beam is preferably a coherent, collimated light beam with a  
30 spherical wave front 10.

          The incorporation of the holographic foil 15 onto a transaction card 5 provides a more reliable method of determining the authenticity of the transaction card 5 in ordinary white light, namely by observing if the hologram has the illusion of depth and changing colors. Thus, to allow the hologram to be viewed with ordinary, white light,



when the hologram is recorded onto the transaction card 5, the image to be recorded is placed near the surface of the substrate. Moreover, the hologram is be embossed on a metalized carrier, such as the holographic foil 15, or alternatively the hologram may be cast directly onto the transparent plastic material. When formed on the clear plastic material, the hologram is made visible by the deposit of a visible substance over the embossed hologram, such as a metal or ink. More information regarding the production of holograms on chargecards 5 or the production of holographic foil 15 can be found in, for example, U.S. Patent No. 4,684,795 issued on August 4, 1987 to United States Banknote Company of New York or from the American Banknote Holographics, Inc. web site at [www.abnh.com](http://www.abnh.com), both of which are herein incorporated by reference.

In an exemplary embodiment, the application of holographic foil onto vinyl credit cards is accomplished by using a metallized credit card foil. The foil is un-sized, metallized, embossable, abrasion, and chemical resistant hot stamping foil on a 1.0 mil (92 gauge) polyester carrier. All of the exemplary materials are tinted with raw materials supplier color code #563 (blue). The foil is vacuum metallized with aluminum and has an optical density range of about 1.60 to 2.00. The optimum foil is free of visible defects and particulate matter. The foil contains release characteristics of about 0 to 7 grams based upon a release testing unit having a die face of 300 F degrees, 80 psi, 1.0 seconds dwell, 0.1 seconds delay in the removal of the carrier at a 45 degree angle. An exemplary base material is capable of receiving a permanent, high fidelity (based upon an embossing die of 100%, having at least 70% diffraction efficiency) impression of the holographic image surface by embossing with a hard nickel die in the range of about 1600 pounds per linear inch at about 100 pounds air pressure and in the range of about 200 to 350F degrees die temperatures. When testing the embossibility of the base material, the testing includes a primary and secondary image to assure the embossable coating is capable of producing an optimal secondary image.

With respect to the mechanical and chemical durability of the holographic foil, the foil resists abrasions. As such, after sizing and stamping the foil onto the vinyl credit card, the transferred hologram withstands about 100 cycles on the Taber Abrader using CS-10 wheels and about a 500 gram load before signs of breakthrough. The foil resists scuffing such that the foil withstands about 6 cycles on Taber Abrader under the same conditions without any substantial visual marks, scratches or haze.

The holographic foil also resists any substantial evidence of cracking the vinyl in the hologram area when embossed on a DC 50000 encoder or an equivalent system. Moreover, the embossed, un-sized foil on the polyester carrier is capable of being stretched 15% without cracking of the base coat. Moreover, the exemplary vinyl card with the exemplary hologram withstands 15 minutes in an oven at 110 C° with the image clearly visible after the test. Additionally, the exemplary hologram does not show any visible effects after 5 cycles of 8 hours at 0° and 16 hours at 60C°.

The exemplary holograms on the vinyl cards also resist plasticizers, alkalis, acids and solvents. In particular, the cards with holograms withstand immersion in warm liquid plasticizers (typically dioctyl phthalate) up to the point of severe swelling of the card. The image on the card is not substantially affected by contact with plasticized vinyl for a period of 5 days at 60C°. With respect to alkalis, the holograms on the cards withstand approximately 1 hour immersion in 10% ammonium hydroxide at room temperature without deterioration. Moreover, the hologram does not show substantial deterioration after 50 hours of immersion at room temperature in artificial alkaline perspiration (10% sodium chloride, 1% sodium phosphate, 4% ammonium carbonate, and pH 8.0). With respect to acids, the exemplary holograms on the cards substantially withstand approximately 1 hour immersion in 10% acetic acid at room temperature without substantial deterioration. Moreover, the exemplary hologram substantially withstand, without substantial deterioration, 50 hours immersion at room temperature in artificial acetic perspiration (10% sodium chloride, 1% sodium phosphate, 1% lactic acid, pH 3.5).

With respect to solvents, the exemplary holograms on cards substantially withstand the following: ethylene glycol (100% and 50% in water) with no substantial effects after 4 hours at room temperature, ethyl alcohol (100% and 50% in water) with no substantial effect after 4 hours at room temperature, methyl ethyl ketone has no substantial effect after 1 minute at room temperature, toluene has no substantial effect up to severe swelling of the card (30 minutes at room temperature), water has no substantial effect after 16 hours at 60 C° and concentrated laundry detergent has no substantial effect after 20 hours at room temperature.

Moreover, the exemplary holograms on the vinyl cards do not show substantial effects after being washed and dried in a commercial washer and dryer inside a pants pocket at permanent press settings.

The charge card substrate is comprised of a vinyl base or other comparable type material which is suitably capable of accepting a hot stamping of a hologram without substantially violating the present composition of the hologram or its coatings. When adhering the hologram to the vinyl card, the coating exhibits a consistent blush  
5 and is uniform in color, viscosity and free of contamination. The adhesion of the hologram to the card is also sufficiently strong enough such that the application of Scotch 610 tape over the hologram which is removed at a 45° angle will not result in a significant amount of foil removed from the substrate.

With respect to the brightness of the image, a diffraction reading is obtained at a  
10 minimum of about 2 microwatts on the registration blocks. Moreover, with respect to image quality, the images are substantially free of defects such as large spots, scratches, wrinkles, mottle, haze, and/or any other defects which substantially distort the image.

The final exemplary product is slit at a width of 1-53/64" +/- 1/64" and length of  
15 10,000 images per roll. The registration block is located no more than about 5/64" from the edge of the slit material. All finished rolls are wound with the metal side facing in on a 3.0" ID core with a maximum of 3 splices permitted per finished reel and the registration blocks are .125" x .125" square.

After stamping out the individual cards 5 and applying the holographic foil, the  
20 IC chip 20 is applied to card 5 (step 195) by any suitable method, such as adhesive, heat, tape, groove and/or the like. More particularly, a small portion of the front 10 of card 5 is machined out using, for example, a milling process. The milling step removes about 0.02 mils of plastic from the front 10 surface, such that the routed hole cuts into the two core layers of plastic, but does not go through the last outer laminate layer of  
25 plastic, thereby forming a 5235HST pocket. IC chip 20 is a 5235 palladium plated with silver, rather than the standard gold plating. IC chip 20 is applied to the card using a process known as "potting". Any suitable adhesive, such as a non-conductive adhesive, is placed into the machined hole and the IC chip 20 is placed over the  
30 10 surface of card 5. Suitable pressure and heat is applied to the IC chip 20 to ensure that the IC chip 20 is sufficiently affixed to card 5. The IC chip 20 is any suitable integrated circuit located anywhere on card 5. In an exemplary embodiment, the IC chip 20 structure, design, function and placement conforms to ISO standards for IC

chips 20 and smart cards 5. The IC chip 20 may be obtained from, for example, Siemens of Germany.

After applying the holographic foil 15 and the IC chip 20 to card 5, certain information, such as account number 35 and "active thru" 32 date (not shown), are preferably embossed into card 5 (step 200) by known embossing methods. The embossing can be completed by, for example, Oberthur Card Systems. Although any information can be embossed anywhere on card 5, in a particularly exemplary embodiment, the account numbers 35 are embossed through the holographic foil 15 to reduce the possibility of the transfer of the holographic foil 15 to a counterfeit card 5 for fraudulent use. Additionally, although prior art cards 5 include a beginning and ending validity date, the present card 5 only includes an "active thru" 32 date, namely a date in which the card expires.

While the foregoing describes an exemplary embodiment for the fabrication of card 5, one skilled in the art will appreciate that any suitable method for incorporating text 30, 32, 34, logos 50, embossed numbers 35, a magnetic stripe 42, a signature field 45, holographic foil 15, an IC chip 20 and opacity gradient 25 (see Figures 1 and 2) onto a substrate is within the scope of the present invention. Particularly, the holographic foil 15, IC chip 20, logo 50, magnetic stripe 40, signature field 45 or any other compound may be affixed to any portion of card 5 by any suitable means such as, for example, heat, pressure, adhesive, grooved and/or any combination thereof.

The present invention has been described above with reference to an exemplary embodiment. However, those skilled in the art having read this disclosure will recognize that changes and modifications may be made to the exemplary embodiment without departing from the scope of the present invention. For example, various steps of the invention may be eliminated without altering the effectiveness of the invention. Moreover, other types of card fabrication, encoding and printing methods may be used such as dye sublimation retransfer technology and/or double transfer technology developed by Dai Nippon Printing Company of Japan. These and other changes or modifications are intended to be included within the scope of the present invention, as expressed in the following claims.

**What is claimed is:**

1. A card comprising:  
at least one of a translucent and transparent card surface; and,  
a machine recognizable compound associated with a portion of said surface.  
5
2. The card of claim 1, wherein said card is at least one of a transaction card, identification card, smart card, credit card, charge card, debit card, access card, information storage card, electronic commerce card, document and paper.
- 10 3. The card of claim 1, wherein said machine recognizable compound includes at least one of a chemical, solution, dye, layered material, pigment, encapsulated pigment, coating, film, thread, plastic, ink, concentrate, thermoplastic matrix, thermoset matrix, fiber, paper, and planchette.
- 15 4. The card of claim 1, wherein said machine recognizable compound includes at least one of invisible, visible or colored compounds.
5. The card of claim 1, wherein said machine recognizable compound includes an infrared ink.  
20
6. The card of claim 1, wherein said machine recognizable compound includes an infrared ink comprising in the range of about 0.001 to 40.0 wt.(%) of an infrared activated material.
- 25 7. The card of claim 1, wherein said machine recognizable compound includes an optically recognizable compound.
8. The card of claim 1, wherein said machine recognizable compound is configured to at least one of block, diffuse, reflect, refract and absorb infrared  
30 light.
9. The card of claim 1, wherein said machine recognizable compound includes at least one of a binder, UV absorber, reflector, antioxidant, optical brightener,

color shifter, chemical configured to improve processing, and chemical configured to adjust rheological properties.

- 5 10. The card of claim 1, wherein said machine recognizable compound includes:  
about 2% Epolin VII-164 dye, about 98% Tech Mark Mixing Clear, about 980.0g  
of Tech Mark solvent evaporative screen ink, about 20.0g of Epolight VII-164  
dye.
- 10 11. The card of claim 1, wherein said machine recognizable compound includes:  
about 15.0 lbs of Epolin VII-164 dye, about 965 lbs of Tech Mark Mixing Clear,  
and about 20.0 lbs of Epolight VI-30 dye.
- 15 12. The card of claim 1, wherein said machine recognizable compound includes:  
about 30.0 grams of Epolight VII-172 dye, 700.0 grams of polyvinylchloride  
plastic, and 99.0 lbs of PVC.
- 20 13. The card of claim 1, wherein said machine recognizable compound includes  
PET plastic.
- 20 14. The card of claim 1, wherein said machine recognizable compound includes:  
about 0.80 grams Tech Mark mixing clear, about 0.07 grams VMCA resin, about  
0.10 grams cyclohexanone, and about 0.03 grams epolight vii-164.
- 25 15. The card of claim 1, wherein said machine recognizable compound includes:  
about 0.55 grams vinyl VMCA resin, about 0.35 grams EEP solvent, about 0.05  
grams cyclohexanone, about 0.03 grams epolight vii-164, and 0.02 grams  
epolight vi-30.
- 30 16. The card of claim 1, wherein said machine recognizable compound includes:  
about 0.90 grams TM mixing clear, about 0.03 grams cyclohexanone, about  
0.03 grams epolight vii-164, about 0.02 grams epolight vi-30, and about 0.02  
grams epolight 6084.
17. A card comprising: at least one of a translucent and transparent card surface;

a machine recognizable compound associated with a portion of said surface;  
and,  
at least one of a holographic foil, an integrated circuit chip, a magnetic stripe, an  
opacity gradient, embossed characters, signature field, text and logo.

5

18. The card of claim 17, wherein said card is at least one of a transaction card,  
identification card, smart card, credit card, charge card, debit card, access card,  
information storage card, electronic commerce card, document and paper.

10 19. The card of claim 17, wherein said machine recognizable compound includes at  
least one of a coating, film, thread, plastic, ink, fiber, paper, and planchette.

20. A card comprising:  
at least one of a opaque, translucent and transparent card surface;  
15 a machine recognizable compound associated with a portion of said surface;  
a holographic foil;  
an integrated circuit chip; and,  
a magnetic stripe.

20 21. A process for fabricating a card including placing IR film between two layers of  
PET GS.

22. The process of claim 21 further comprising chemical deposition by at least one  
of vacuum coating, solar coating and Magnetron sputtering, providing a  
25 laminate, providing a core layer and adhering the layers of the card with  
adhesive.

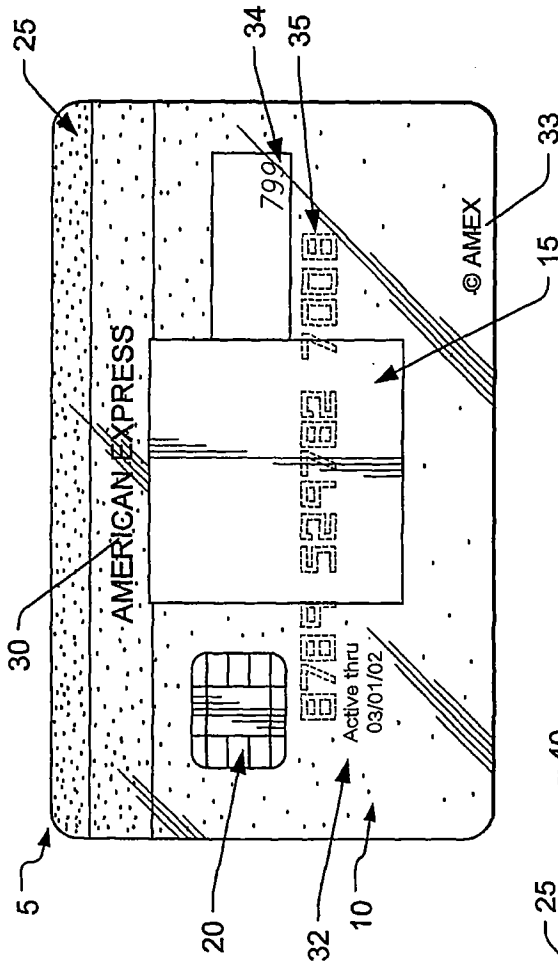


FIG. 1

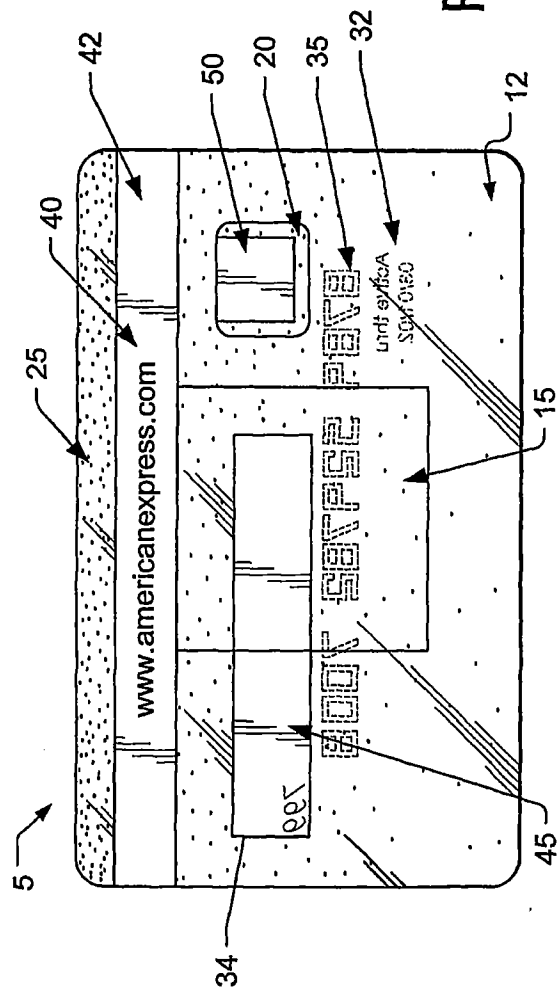


FIG. 2



2/30

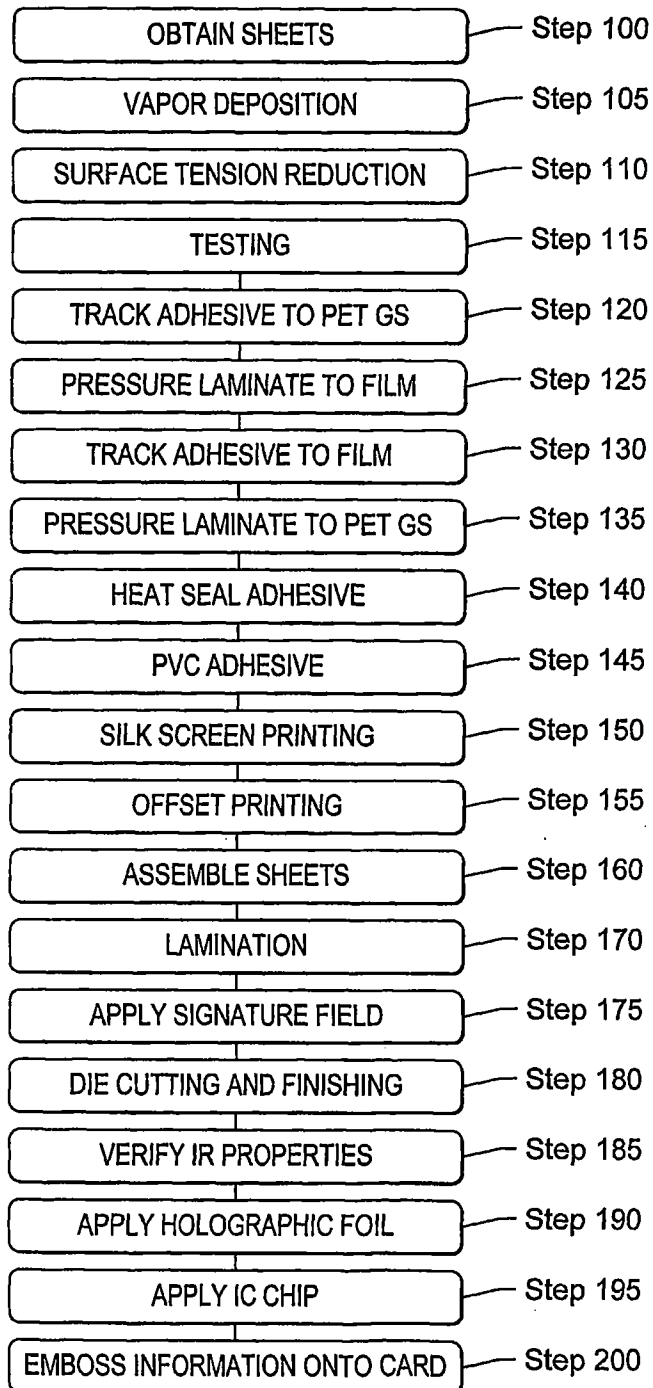


FIG. 3


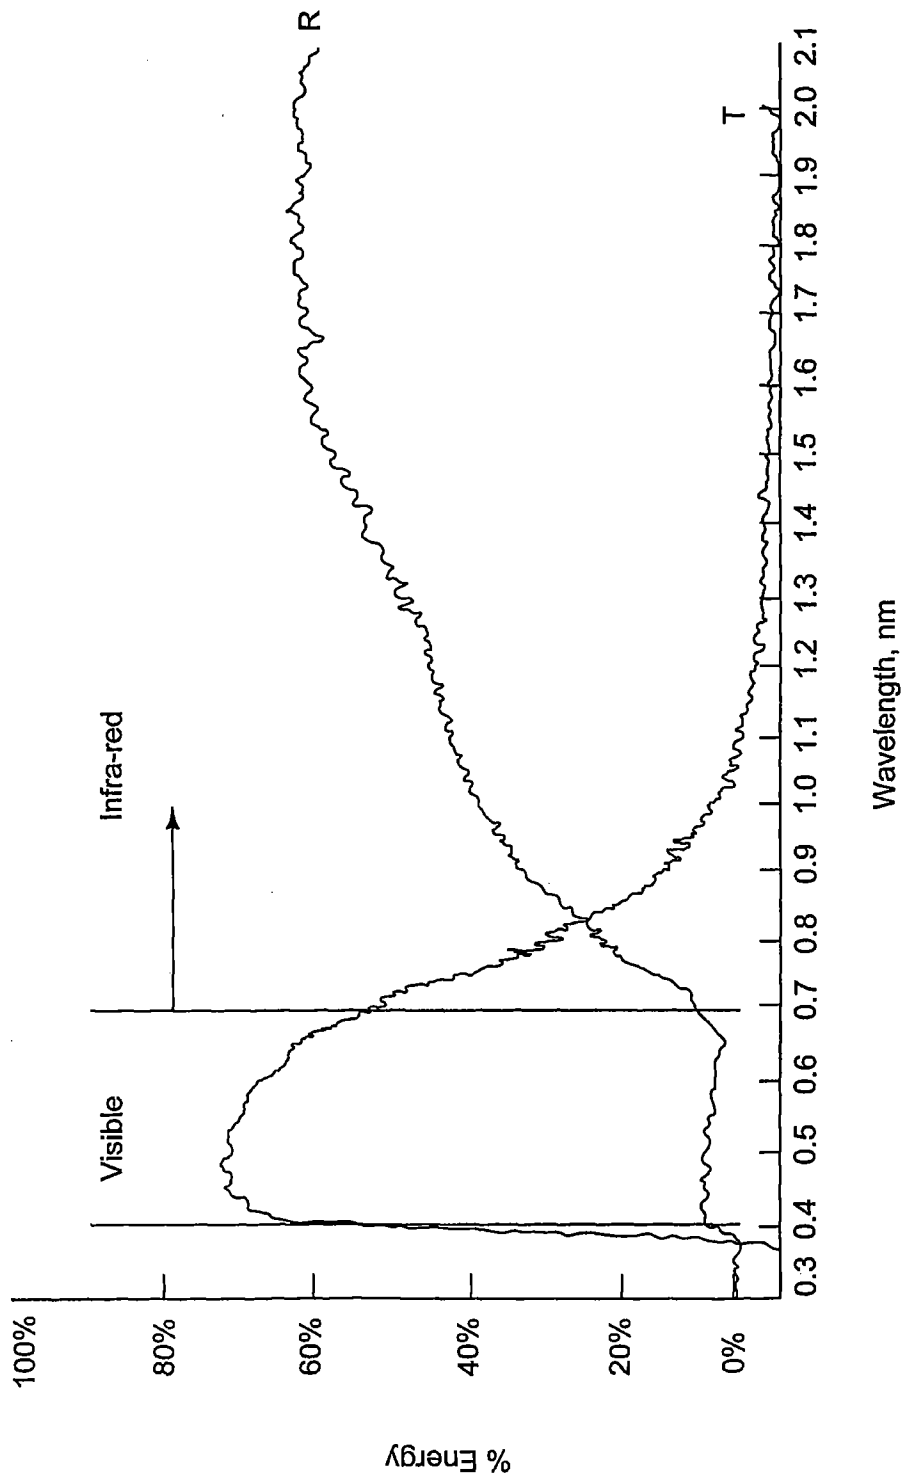


FIG. 4

The spectral curve of the LED

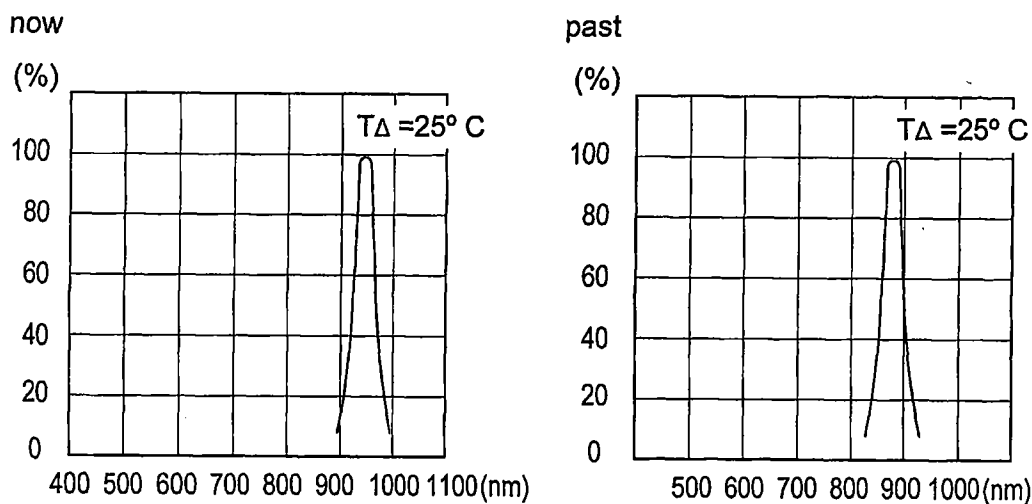

LED that Sankyo use overall is 800-1000 nm wavelength

FIG. 5

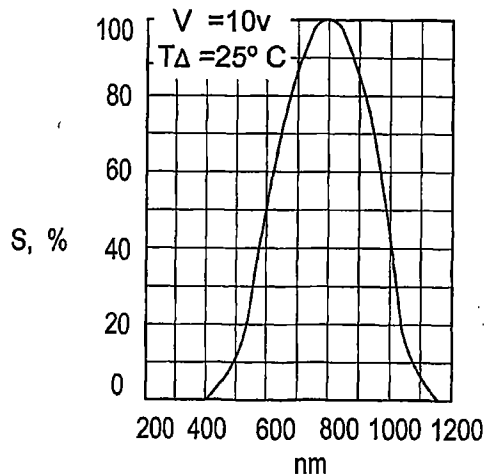


FIG. 6

# FIG. 7A

CARD FRONT

Holographics, embossed surface, chip, etc.

PVC laminate - 2.0 mil

Printed PVC - 9.0 mil

PVC adhesive - 2.0 mil

PET GS - 1.7 mil

PET IR block film - 2.0 mil


PET GS - 1.7 mil

PVC adhesive - 2.0 mil

Printed PVC - 9.0 mil

PVC Laminate with Magnetics - 2.0 mil

5/30

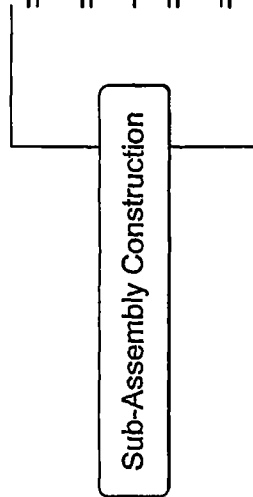

Signature Panel, magnetic strip, etc.

CARD BACK

6/30

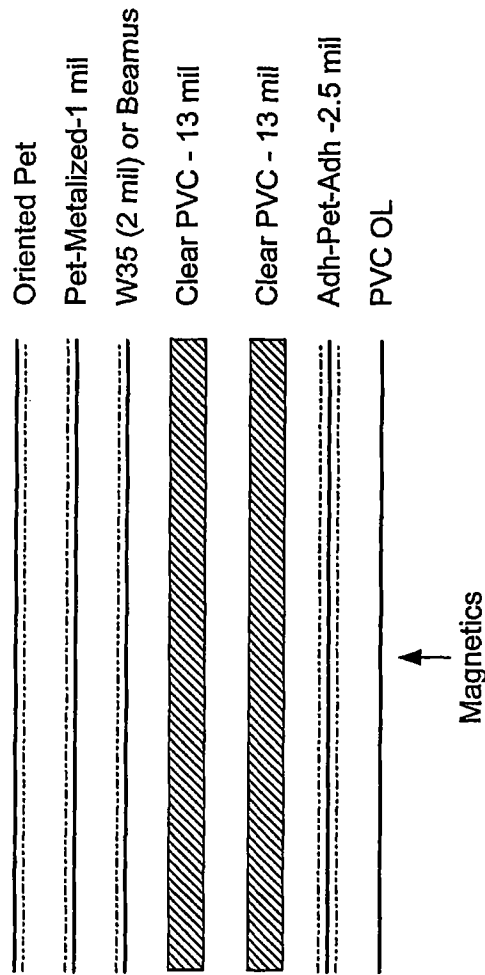


FIG. 7B

7/30

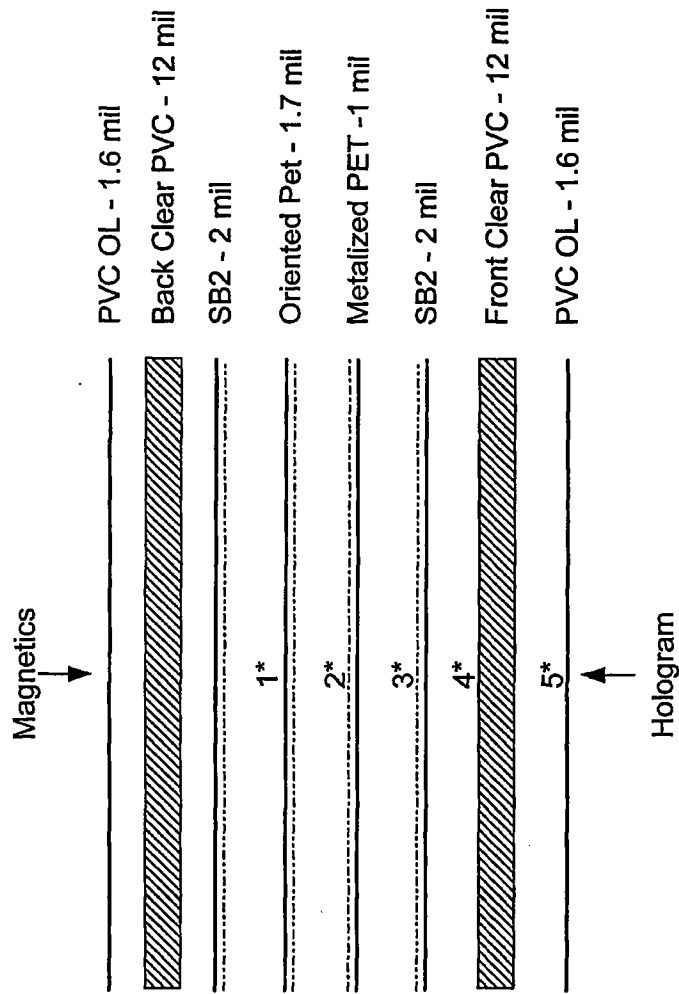


FIG. 7C

8/30

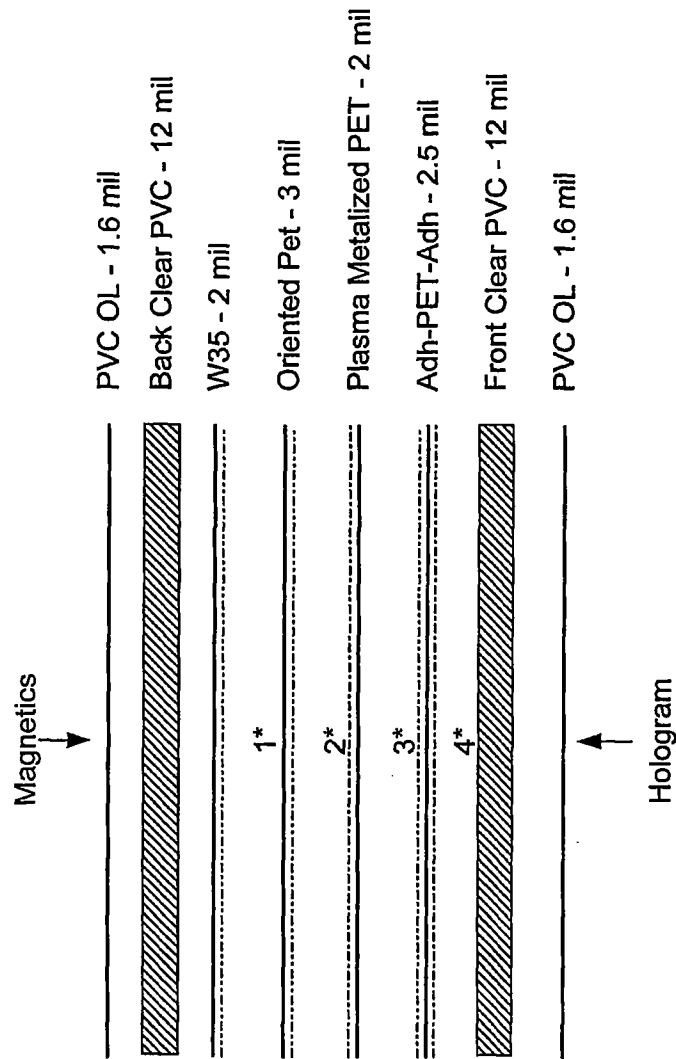


FIG. 7D

9/30

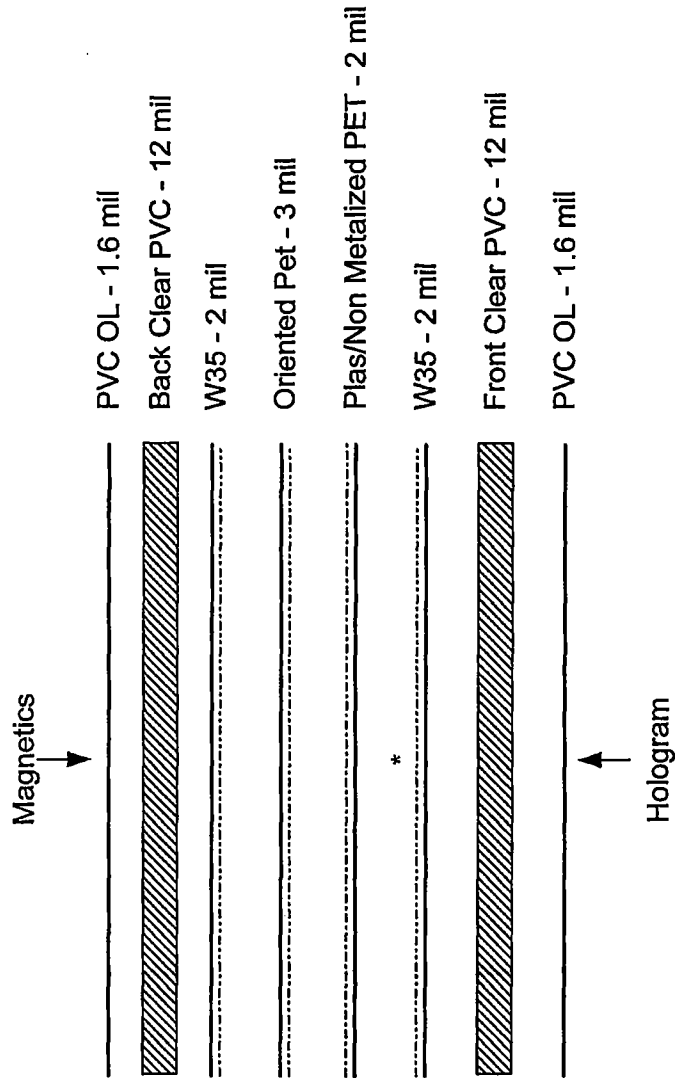


FIG. 7E



10/30

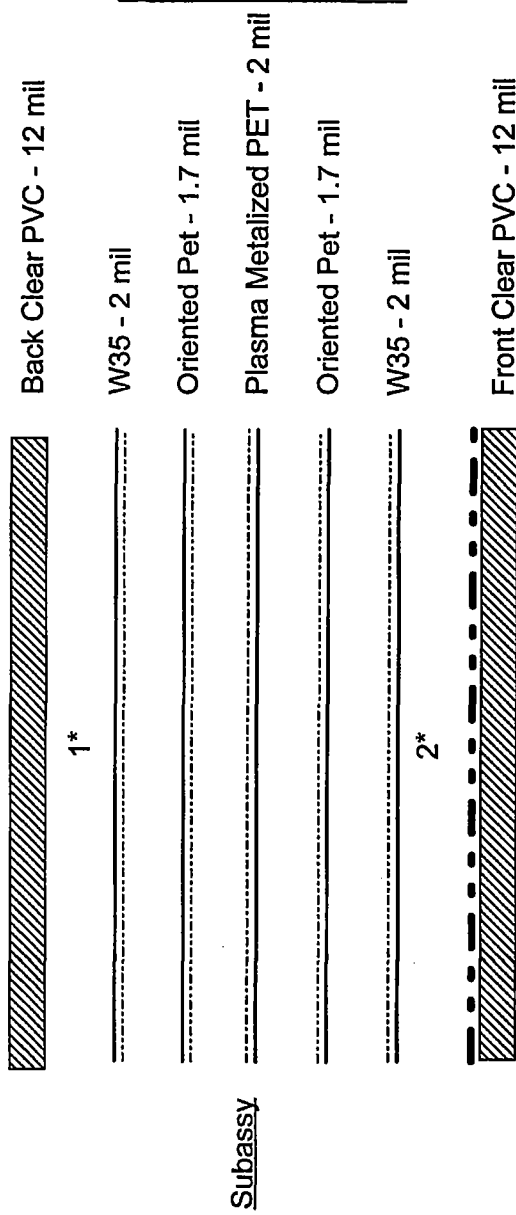


FIG. 7F

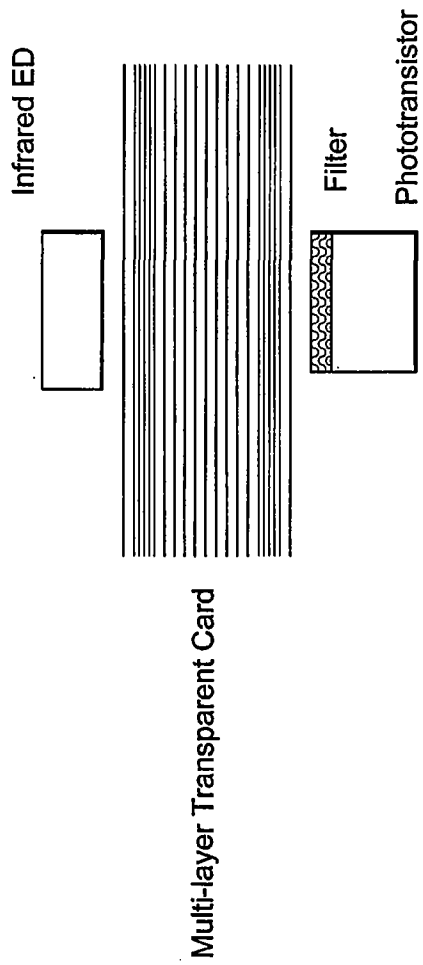


FIG. 8

12/30

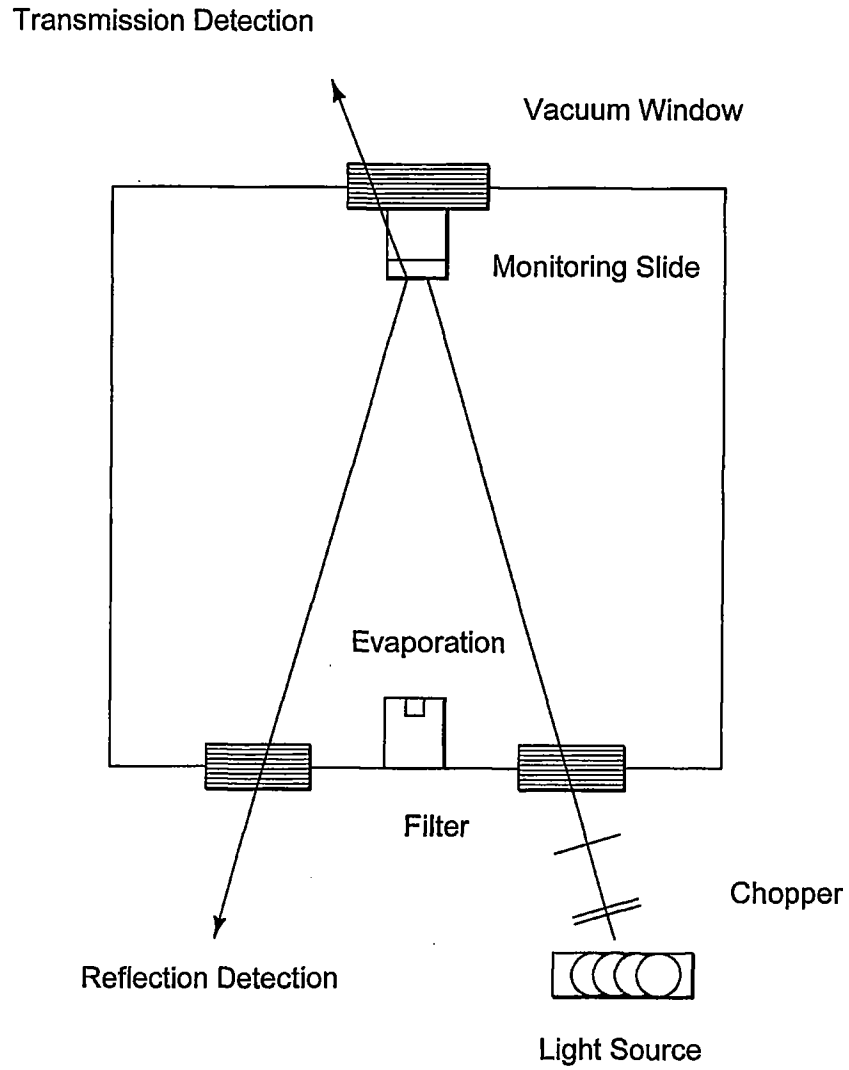


FIG. 9

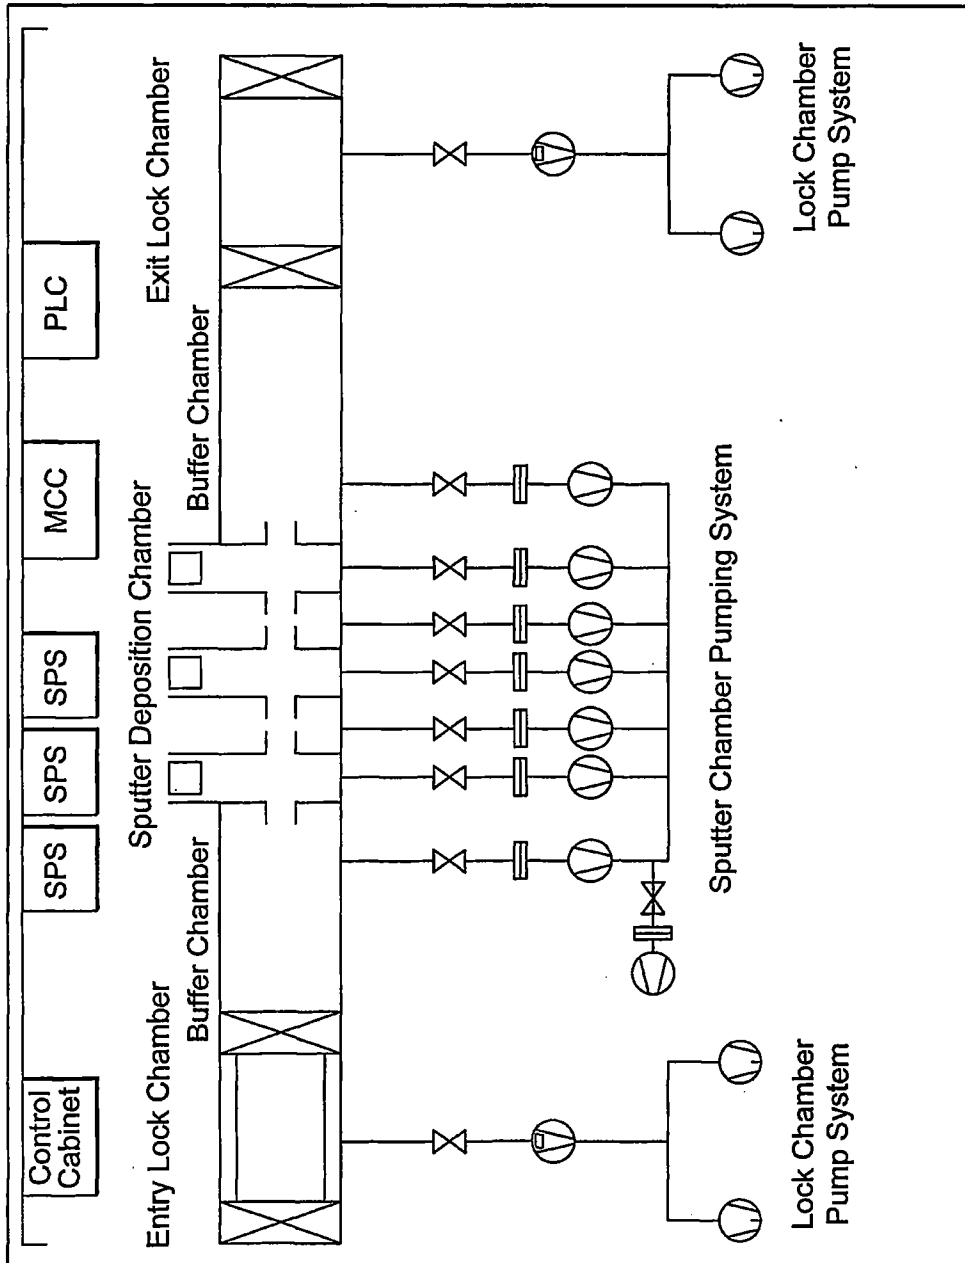


FIG. 10

14/30

Number	Material	Specifications	Source	Comments
Construction 1 - white needs work, lamination temperature too low, pvc core bond low.				
1	pvc laminate	1.60	oberthur	front 4.1,4.4; back 4.0,4.0
2	pet adhesive both sides	2.50	allied signal	
3	printed core - white #1	12.00	oberthur	
4	printed core - white #1	12.00	oberthur	
5	wl-35 pvc (adh to xir)	2.00	klockner	
6	xir (metal to pet gs)	1.00	southwall	
7	pet glue/stamp	1.70	d & k	1.2 mil adhesive, 0.5 mil pet. thickness .030-.031
Total		32.80		
Construction 2				
1	pvc laminate	1.60	oberthur	
2	pet adhesive both sides	2.50	allied signal	
3	printed core	12.00	oberthur	
4	printed core	12.00	oberthur	
5	wl-35 pvc (adh to xir)	2.00	klockner	
6	xir (metal to pet gs)	1.00	southwall	
7	pet glue/stamp (adh to xir)	1.70	d & k	1.2 mil adhesive, 0.5 mil pet.
8	wl-35 pvc (adh to pet)	2.00	klockner	
Total		34.80		
Construction 3				
1	pvc laminate	1.60	oberthur	
2	pet adhesive both sides	2.50	allied signal	
3	printed core	12.00	oberthur	
4	printed core	12.00	oberthur	
5	wl-35 pvc (adh to xir)	2.00	klockner	
6	xir (metal to pet gs)	1.00	southwall	
7	pet glue/stamp (adh to xir)	1.70	d & k	1.2 mil adhesive, 0.5 mil pet.
8	gomar pvc (adh to pet)	2.00	allied signal	
Total		34.80		
Construction 4 - white #2 too dark, temperature too low, pvc lamination bond low				
1	pvc laminate	1.60	oberthur	front - 4.0, 4.3; back tear
2	pet adhesive both sides	2.50	allied signal	
3	printed core - white #2	12.00	oberthur	
4	printed core - white #2	12.00	oberthur	
5	bemis (adh to xir)	2.00	klockner	
6	xir (metal to pet gs)	1.00	southwall	
7	pet glue/stamp	1.70	d & k	1.2 mil adhesive, 0.5 mil pet. thickness .030 - .031
Total		32.80		
Construction 5 - white #3 too dark, temperature too low - pvc lamination bond low				
1	pvc laminate	1.60	oberthur	
2	pet adhesive both sides	2.50	allied signal	
3	printed core - white #3	12.00	oberthur	
4	printed core - white #3	12.00	oberthur	
5	w-35 (adh to xir pet)	2.00	klockner	
6	xir (metal to pet gs)	1.00	southwall	
7	pet glue/stamp	1.70	d & k	1.2 mil adhesive, 0.5 mil pet. thickness .030 - .031
Total		32.80		
howard 1.0 coating				
1	neocryl b725	33.60	zeneca?	
2	EtOH	31.20		
3	nPOAc	31.20		

FIG. 11

15/30

4 citraflex a4	4.00	moreslip, greensboro	
Total	100.00		
Construction #6 - seems to stick ok, best so far, scale up. Make sub-laminat (aka - s)			
1 pvc laminate	1.60	oberthur	
2 core pvc	12.00	oberthur	
3 bemis	2.00	bemis	
4 petgs	1.70	d & k	
5 xir (metal to pet gs)	1.00	southwall	plasma treated
6 bemis	2.00	bemis	
7 core pvc	12.00	oberthur	
8 pvc laminate	1.60	oberthur	magnetics
Total	33.90		
herslow sublamination			
Total Price			
Construction #7 - seems to stick ok, best so far, scale up. Make sub-laminat (aka - t)			
1 pvc laminate	1.60	oberthur	
2 core pvc	12.00	oberthur	
3 w-35	2.00	bemis	
4 petgs	1.70	d & k	
5 xir (metal to pet gs)	1.00	southwall	plasma treated
6 bemis	2.00	bemis	
7 core pvc	12.00	oberthur	
8 pvc laminate	1.60	oberthur	magnetics
Total	33.90		
Construction #7 - seems to stick ok, best so far, scale up. Make sub-laminat (aka - t)			
1 pvc laminate	1.60	oberthur	
2 core pvc	12.00	oberthur	
3 w-35	2.00	bemis	
4 petgs	1.70	d & k	
5 xir (metal to pet gs)	1.00	southwall	plasma treated
6 w-35	2.00	bemis	
7 core pvc	12.00	oberthur	core to core = 14.2 lb.in.
8 pvc laminate	1.60	oberthur	magnetics
Total	33.90		
Construction #8 - sublaminat to be used with 12 mil pvc core			
1 w-35	2.00		
2 petgs	1.70		
3 xir (metal to pet gs)	1.00		
Total	4.70		
Construction #9 - sublaminat to be used with 10 mil pvc core			
1 pvc laminate	1.60		
2 w-35	2.00		
3 petgs	1.70		
4 xir (metal to pet gs)	1.00		
5 bemis	2.00		
6 pvc laminate	1.60		
Total	9.90		
Construction #10 (if u works)			
1 w35	2.00		
2 petgs	1.70		
3 xir (metal to pet gs)	1.00		
4 w35	2.00		

FIG. 11  
continued

16/30

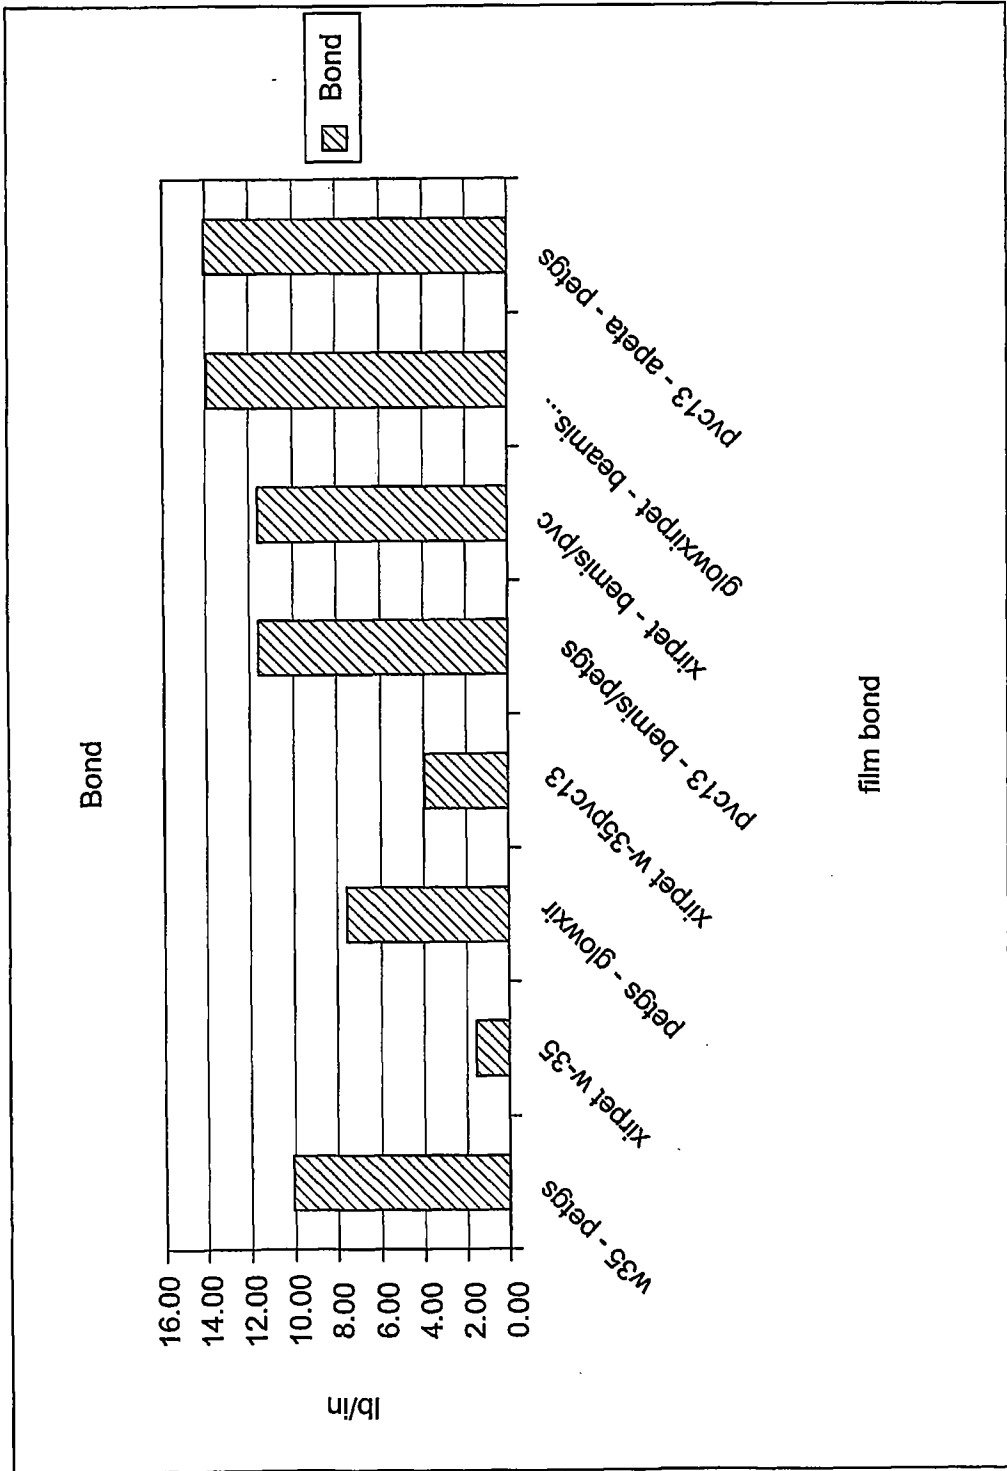


FIG. 12A

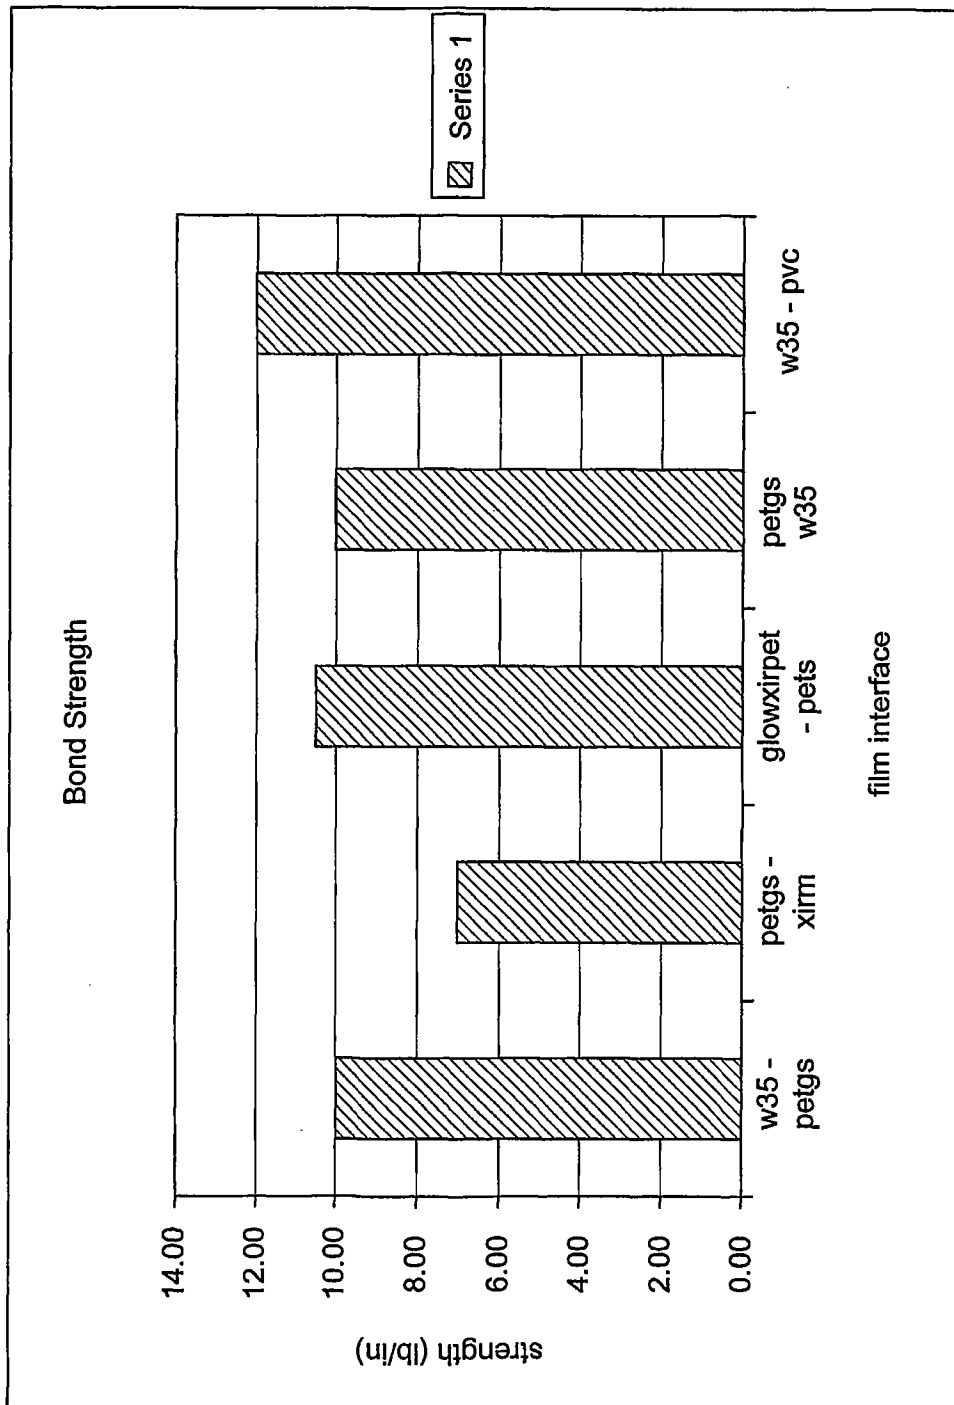


FIG. 12B



18/30

Total	6.70	
ir ink - printed core		
1 tm mixing clear	0.80	sericol
2 vmca resin	0.07	union carbide
3 cyclohexanone	0.10	aldrich
4 epolight vii-164	0.03	epolin
Total	1.00	
ir ink #2		
1 vinyl vmca resin	0.55	union carbide
2 eep solvent	0.35	eastman kodak
3 cyclohexanone	0.05	aldrich
4 epolight vii-164	0.03	epolin
5 epolight vi-30	0.02	epolin
Total	1.00	
ir ink #3		
1 tm mixing clear	0.90	sericol
2 cyclohexanone	0.03	aldrich
3 epolight vii-164	0.03	epolin
4 epolight vi-30	0.02	epolin
5 epolight 6084	0.02	epolin
Total	1.00	

FIG. 13

Green Card Measurements

Wavelength	Transmission Density	ATM Readability	ISO Compliant
400 to 470	1.5 to 2.4	Yes	Yes
470 to 640	1.3 to 0.9	Yes	No
640 to 780	1.3 to 2.5	Yes	Yes
780 to 800	1.3 to 1.2	Yes	Borderline
800 to 1000	1.3 to 2.6	Yes	Yes

FIG. 14

Green RCP ATM Test Results

ATM Manufacturer	Equipment Type	Notes	Global Platform	Pass/Fail
NCR Corporation	15 NCR ATMs 6 Diebold ATMs	Diagnostic and Application tested	Yes	Pass
Diebold	202 and 861 (Universal) Series and Kyoto series (made by Omron)	Diebold require opacity of greater than 1.3 from 700nm plus for acceptance in all Diebold machines	Yes	Pass
Fujitsu	5 ATMs with motorized track, motorized track 2 and dip readers	ATM configuration included card reader firmware for card detection,	Yes (except Japan)	Pass

FIG. 15

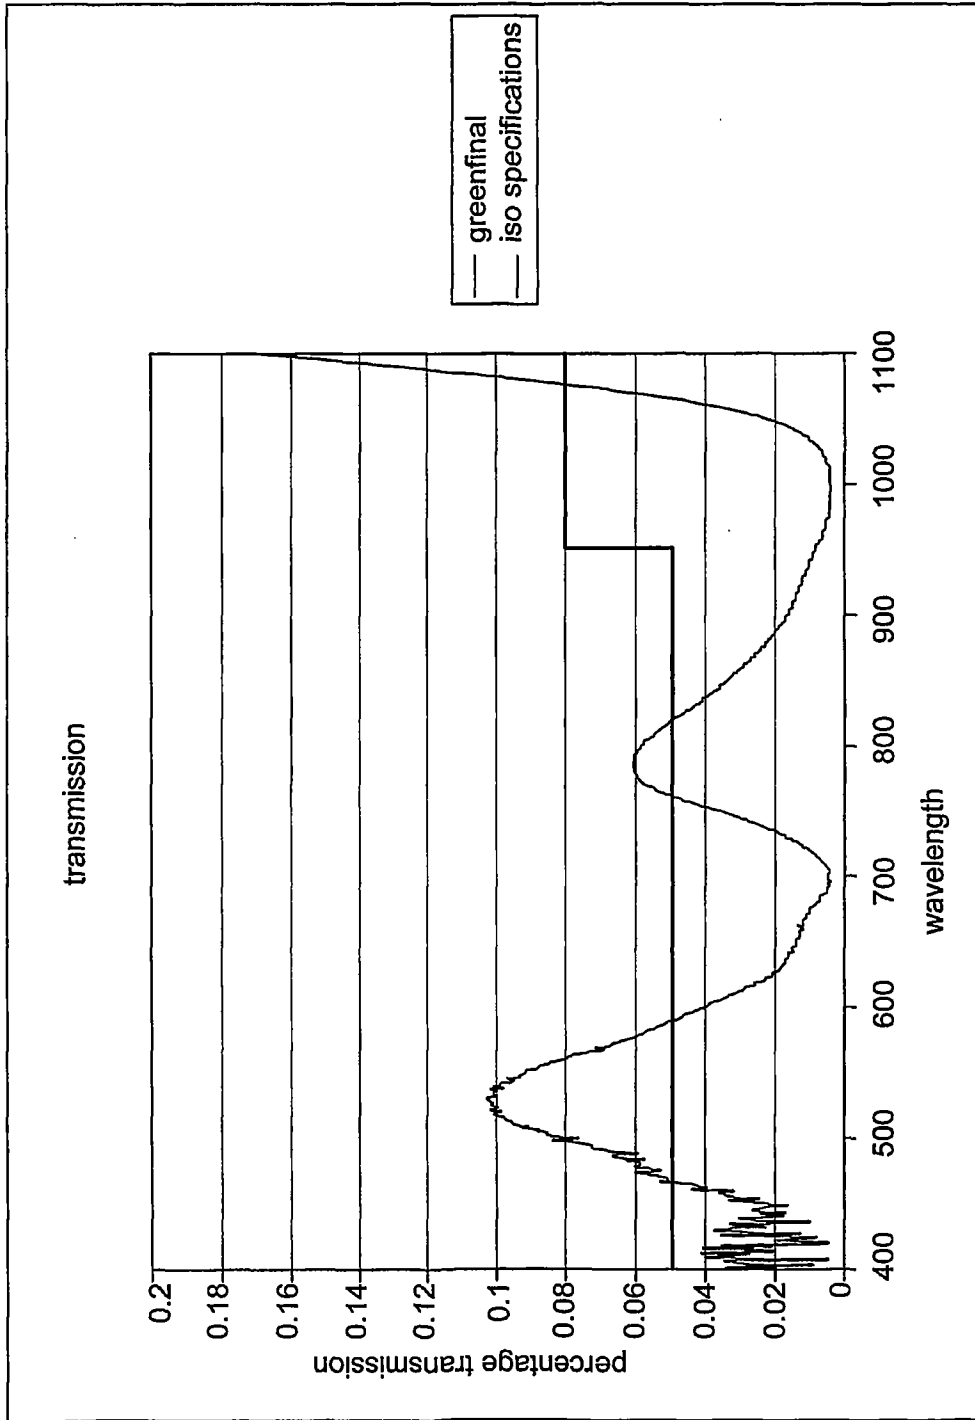


FIG. 16

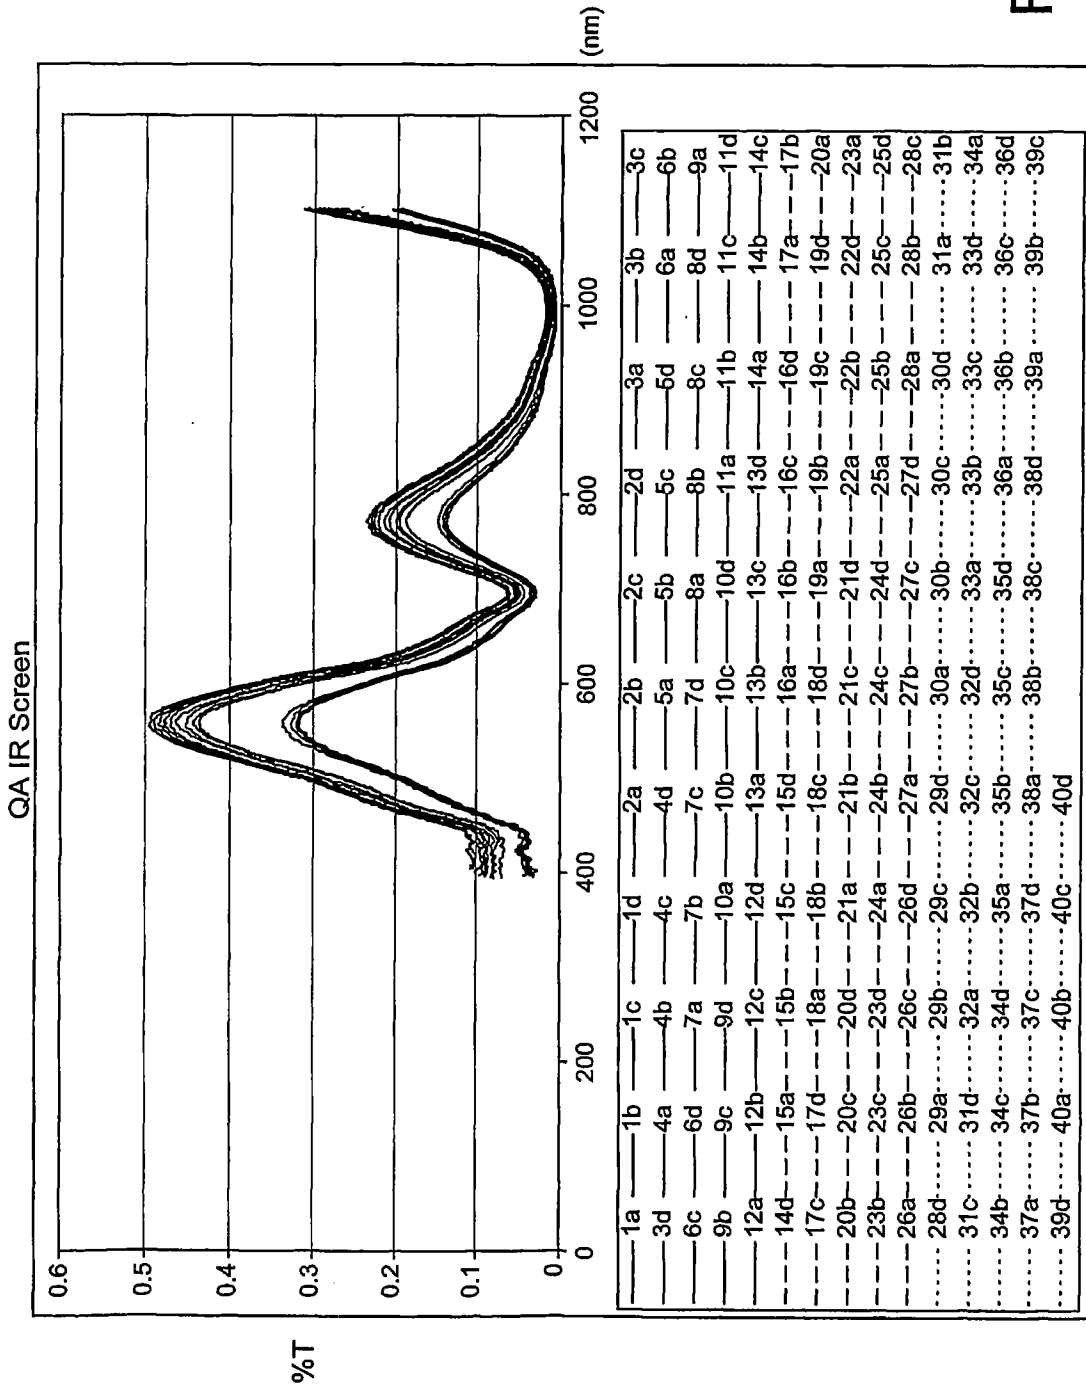


FIG. 17A

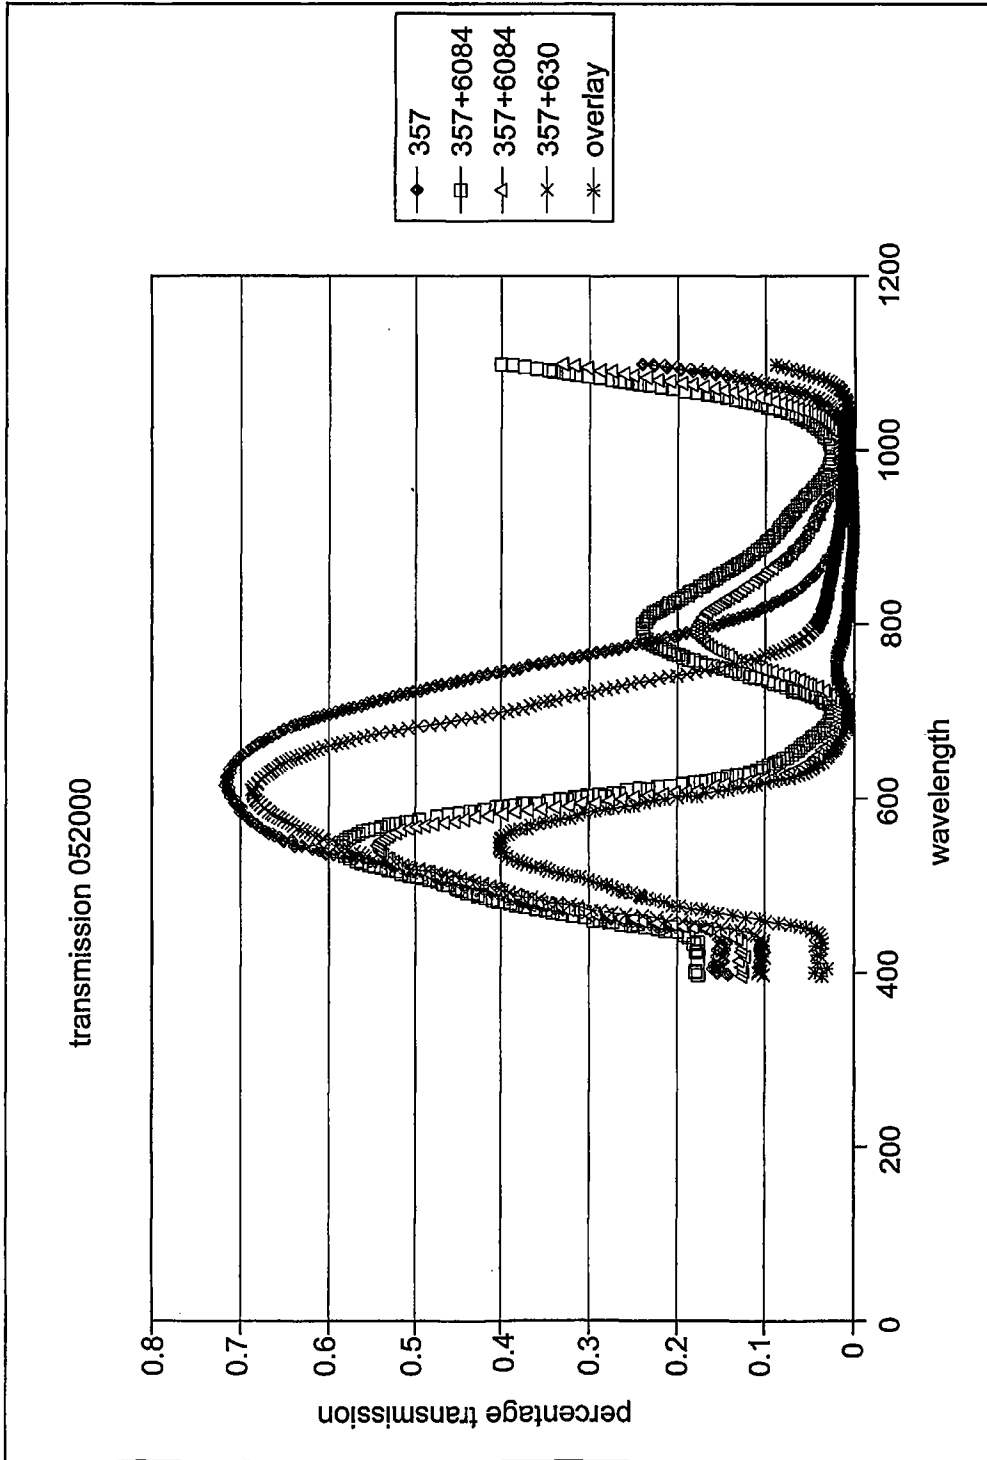


FIG. 17B

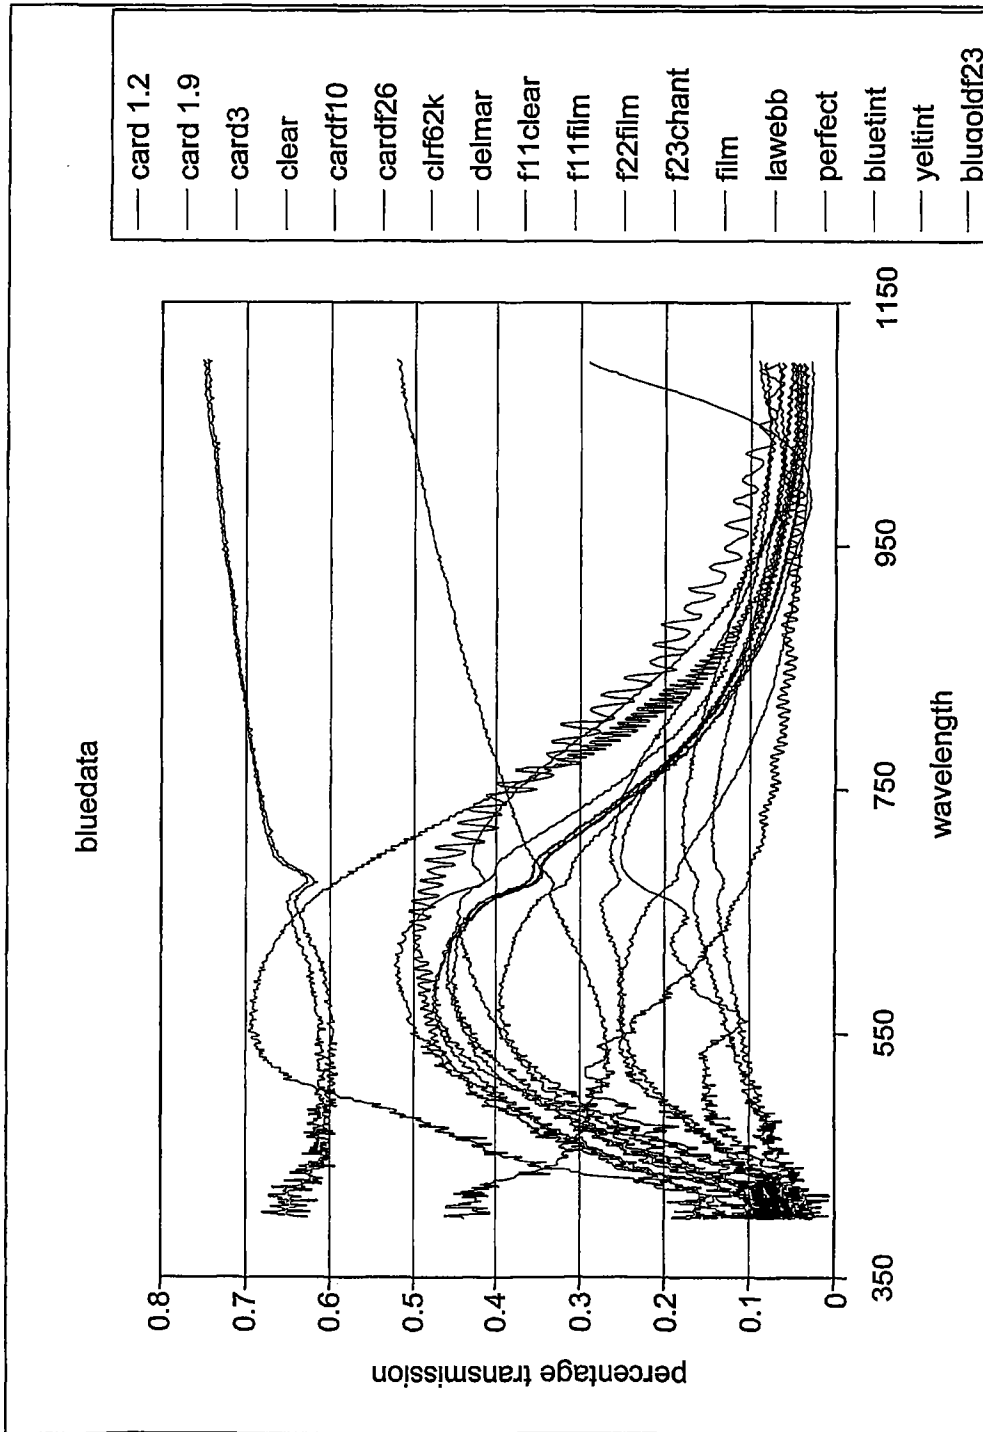


FIG. 17C

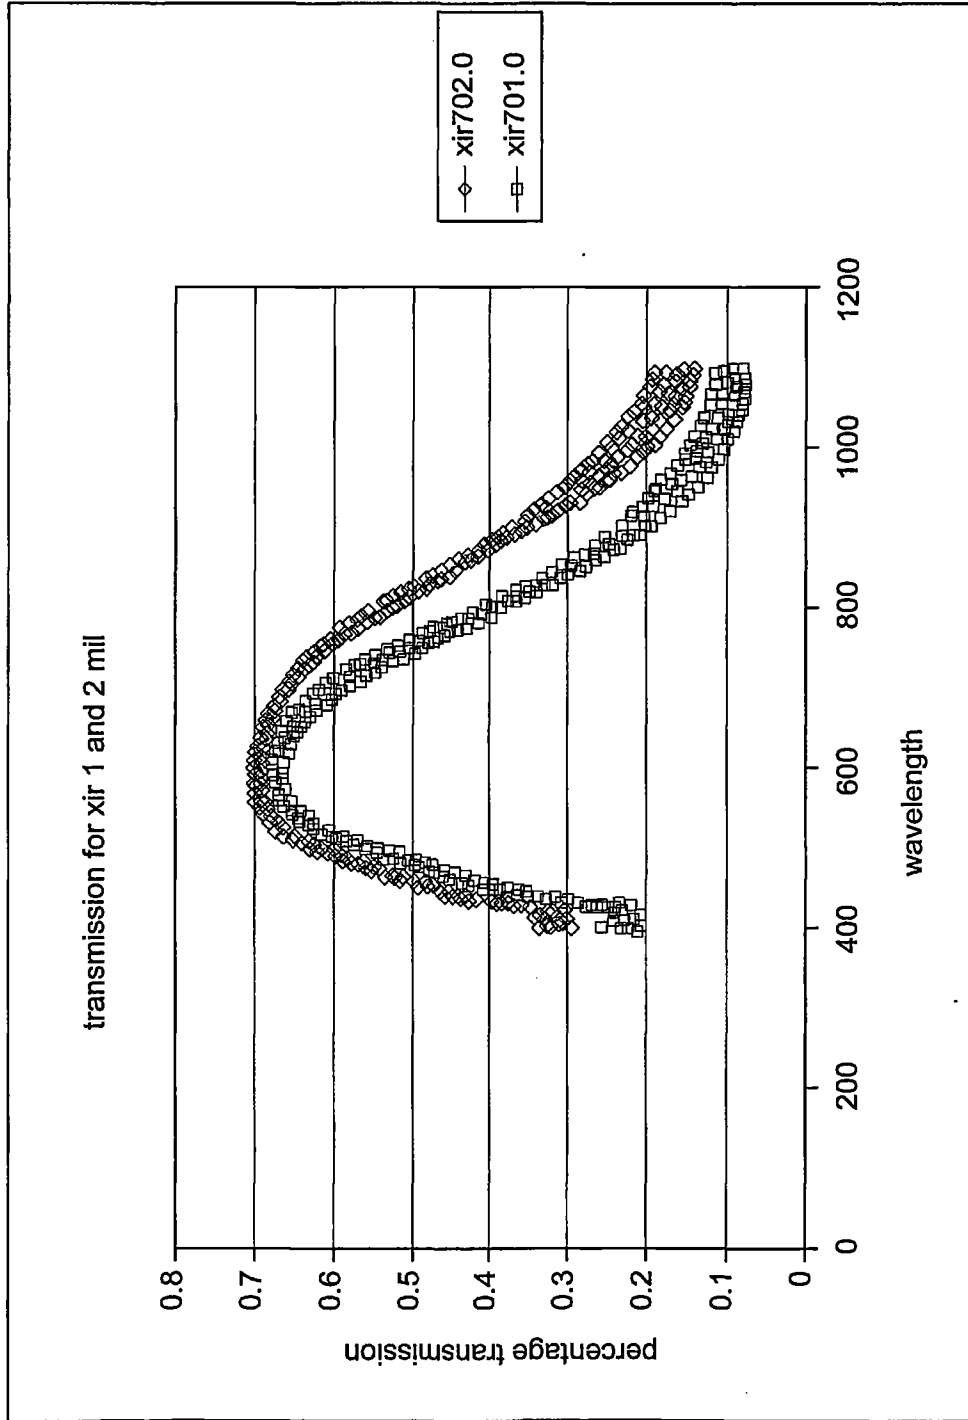


FIG. 17D



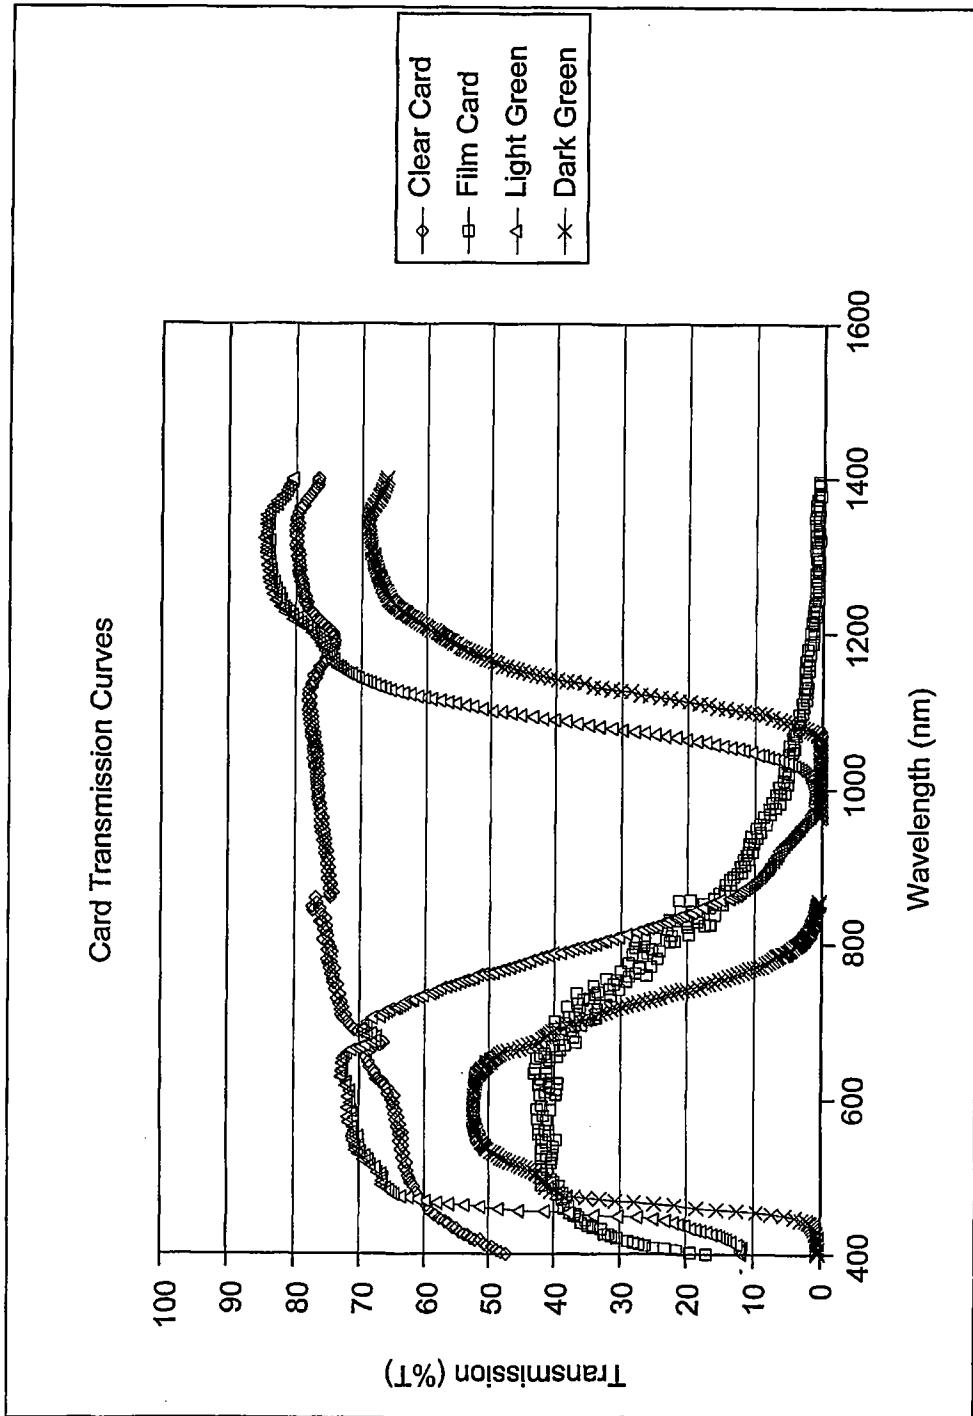


FIG. 17E

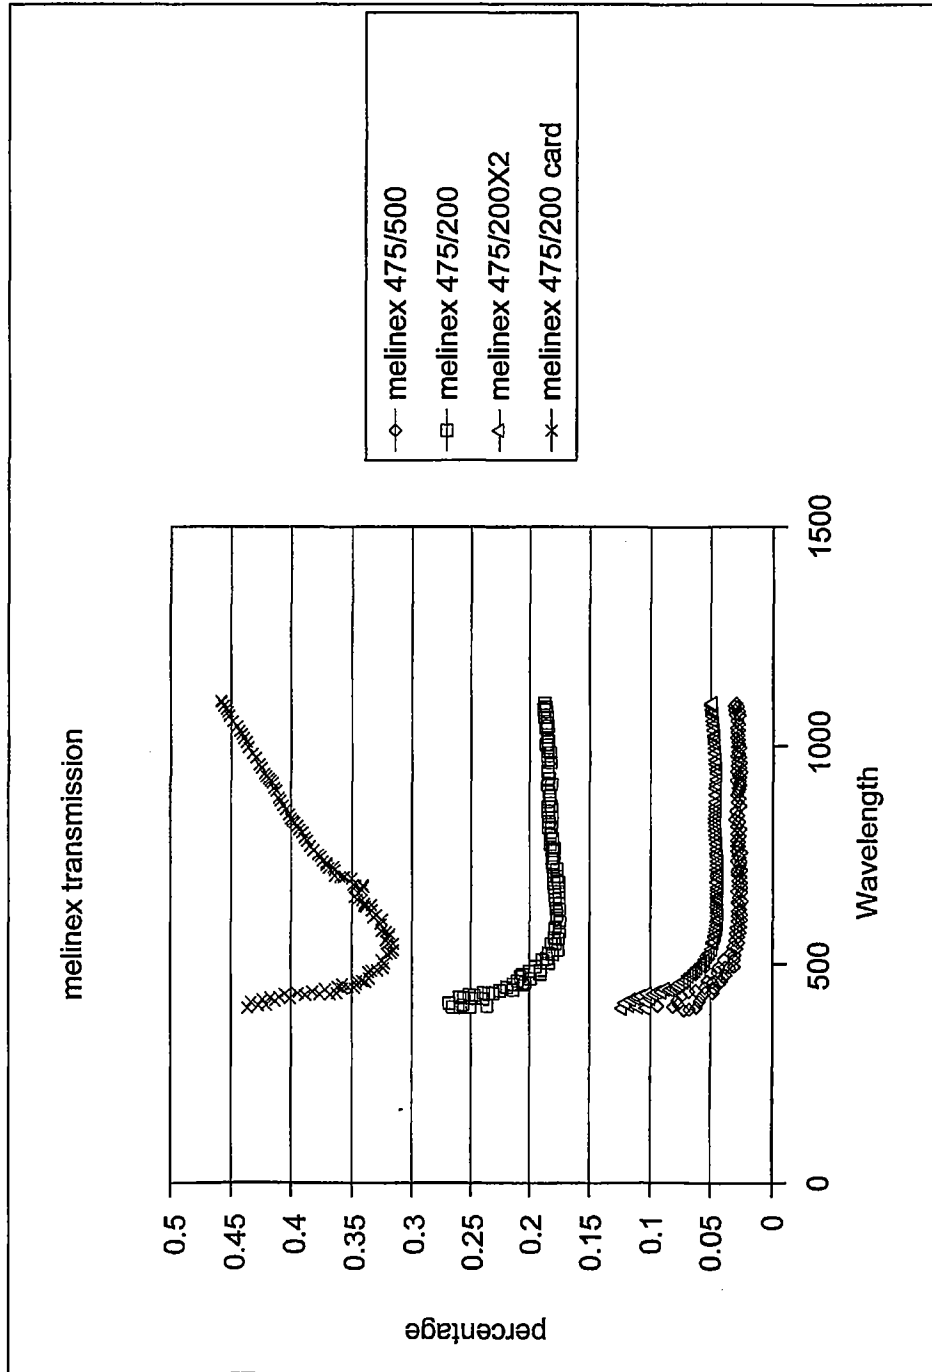


FIG. 17F

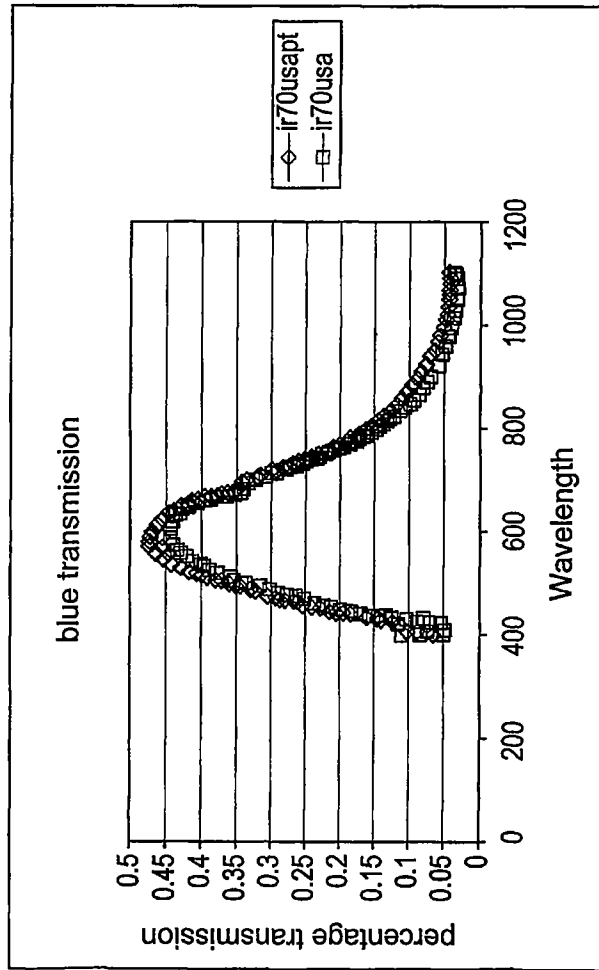


FIG. 17G

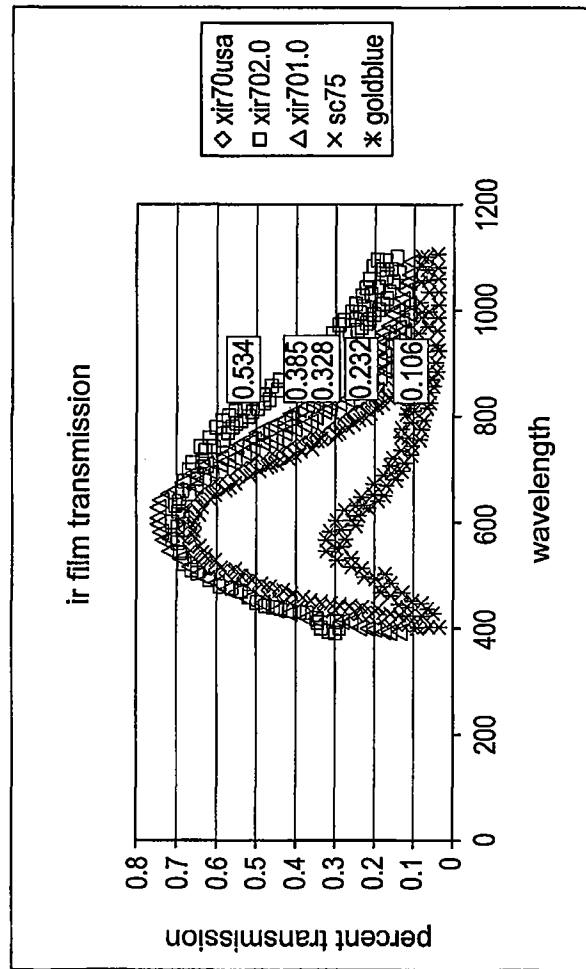


FIG. 17H

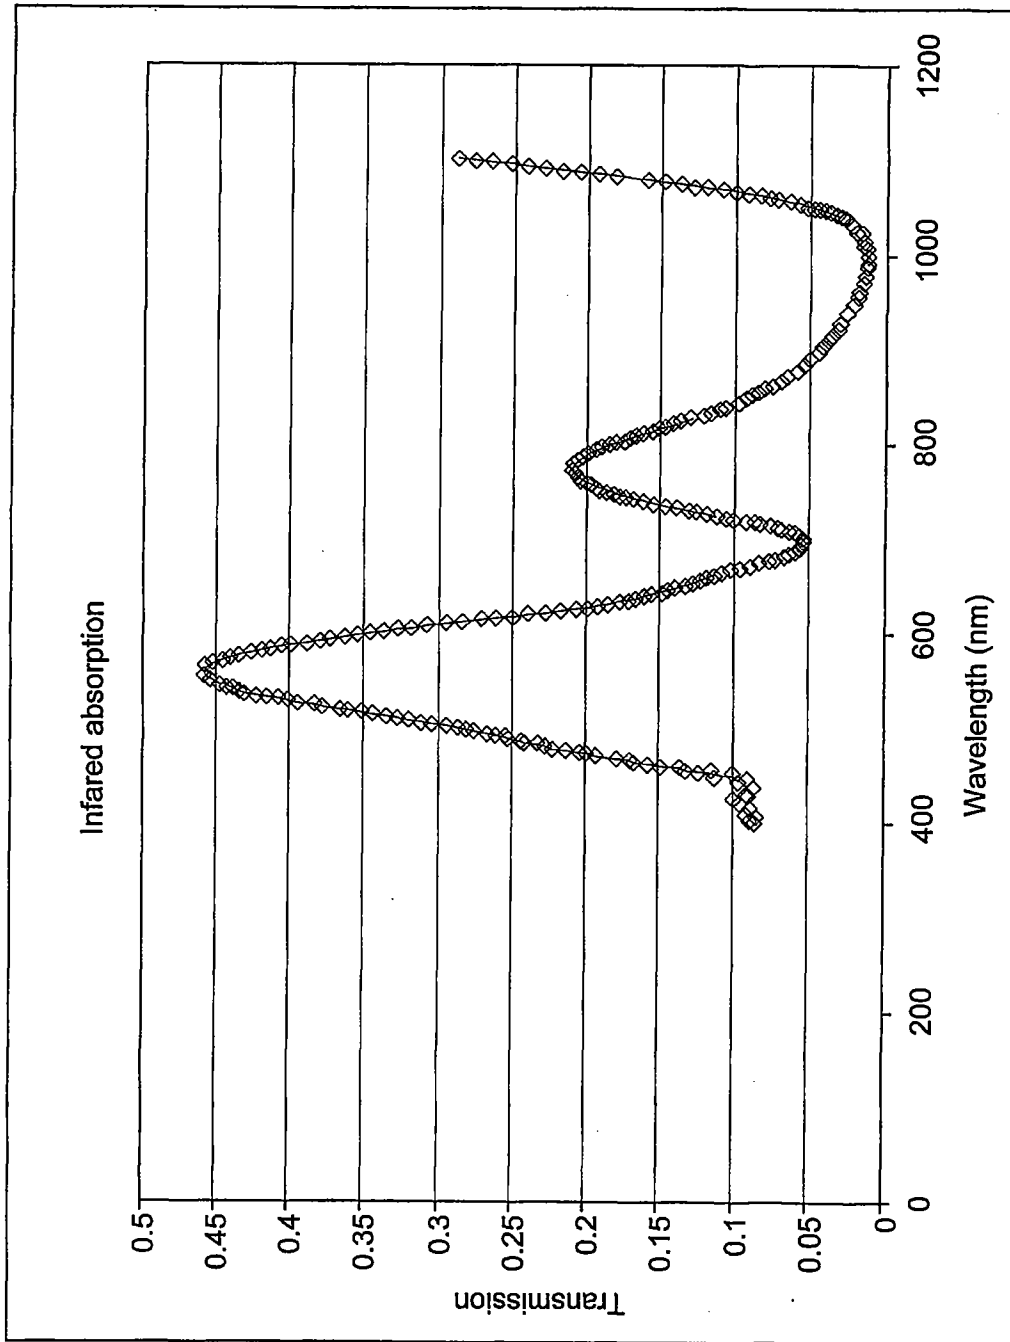


FIG. 171

INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 00/24371

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 7 G06K19/02 G06K19/07 G06K19/16 B42D15/10		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC 7 G06K B42D G11B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) PAJ, WPI Data, EPO-Internal		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 010 243 A (FUKUSHIMA YOICHI ET AL) 23 April 1991 (1991-04-23) column 7, line 30 - line 46 column 9, line 13 - line 36 figures 6,7	1-5,7-9, 17-19,21
Y	---	22
Y	EP 0 181 770 A (CANADIAN PATENTS DEV) 21 May 1986 (1986-05-21) page 5, line 20 - page 6, line 11 page 16, line 26 - line 28 figure 1	22
	---	
	-/--	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.		
<input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents :		
*A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed		*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *Z* document member of the same patent family
Date of the actual completion of the international search  21 February 2001		Date of mailing of the international search report  28. 02. 2001
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer  de Ronde, J.

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 00/24371

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 013, no. 167 (P-861), 20 April 1989 (1989-04-20) -& JP 01 004934 A (BROTHER IND LTD), 10 January 1989 (1989-01-10) abstract page 3, column 2, line 21-27; figures 1-3	1-5,7-9, 17-19
X	US 5 928 788 A (RIEDL JOSEF) 27 July 1999 (1999-07-27) column 3, line 36 - line 58 column 5, line 59 - line 67 figures 1,2	1-4,7,9, 13,17-19
X	EP 0 343 829 A (TIME & DATA SYST INT) 29 November 1989 (1989-11-29) column 4, line 31 - line 39 column 6, line 36 -column 7, line 8 figures 1,2	1-5,7-9
X	US 3 763 356 A (BERLER R) 2 October 1973 (1973-10-02) column 3, line 15 - line 29 column 5, line 14 - line 34 figure 5	1-4,7,9
X	CH 689 680 A (ELECTROWATT TECH INNOVAT CORP) 13 August 1999 (1999-08-13) column 7, line 26 - line 51 figure 7	20
X	US 3 955 295 A (MAYER SIMON ERNEST) 11 May 1976 (1976-05-11) column 4, line 35 - line 49	1-4
X	GB 2 108 906 A (ITR INT TIME LTD) 25 May 1983 (1983-05-25) column 4, line 35 - line 49	1-4

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US 00/24371

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1.  Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2.  Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
  
3.  Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

see additional sheet

As a result of the prior review under R. 40.2(e) PCT,  
no additional fees are to be refunded.

1.  As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2.  As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3.  As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4.  No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

The additional search fees were accompanied by the applicant's protest.

No protest accompanied the payment of additional search fees.



**FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210**

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-20

A card comprising a transparent or translucent card surface,  
and a machine recognizable compound associated with a  
portion of said surface,

wherein said machine recognizable compound includes an  
infrared ink

2. Claims: 21,22

A process for fabricating a card including placing an IR  
film between two layers of PET GS.

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/24371

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5010243	A	23-04-1991	JP 63098689 A AT 80091 T CA 1328363 A DE 3781502 D DE 3781502 T EP 0264277 A US 4945215 A	30-04-1988 15-09-1992 12-04-1994 08-10-1992 07-01-1993 20-04-1988 31-07-1990
EP 0181770	A	21-05-1986	CA 1228225 A ES 548621 D ES 8704653 A JP 61130918 A	20-10-1987 01-04-1987 16-06-1987 18-06-1986
JP 01004934	A	10-01-1989	NONE	
US 5928788	A	27-07-1999	DE 19507144 A AT 171672 T DE 59503783 D DK 734322 T WO 9611805 A EP 0734322 A ES 2121423 T JP 9507266 T	25-04-1996 15-10-1998 05-11-1998 21-06-1999 25-04-1996 02-10-1996 16-11-1998 22-07-1997
EP 0343829	A	29-11-1989	JP 1307937 A	12-12-1989
US 3763356	A	02-10-1973	NONE	
CH 689680	A	13-08-1999	NONE	
US 3955295	A	11-05-1976	US 3922430 A	25-11-1975
GB 2108906	A	25-05-1983	US 4538059 A	27-08-1985